



EACH GATE PANEL INSTALLATION SHALL INCLUDE A "DUCKBILL GATE HOLDBACK" LATCH MOUNTED ON A 1-5/8" OD GALV POST TO HOLD THE GATE IN THE OPEN POSITION. THE POST AND LATCH SHALL BE INSTALLED ACCORDING TO THE HOLDBACK LATCH MANUFACTURE'S RECOMMENDATION.

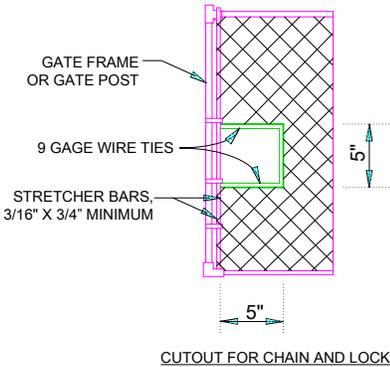

GATE OPENINGS:		OUTSIDE DIAMETER GATE POST SIZE IN INCHES
"A"		"B"
SINGLE TO 6' OR DOUBLE 12' INCL.		2-7/8"
SINGLE OVER 6' TO 13' OR DOUBLE OVER 12' TO 26' INCL		3-1/2"
SINGLE OVER 13' TO 18' OR DOUBLE OVER 26' TO 36' INCL.		6-5/8" *
SINGLE OVER 18' TO 18' OR DOUBLE OVER 36'		8-5/8" *

\*REQUIRES REVIEW & WRITTEN APPROVAL BY DISTRICT

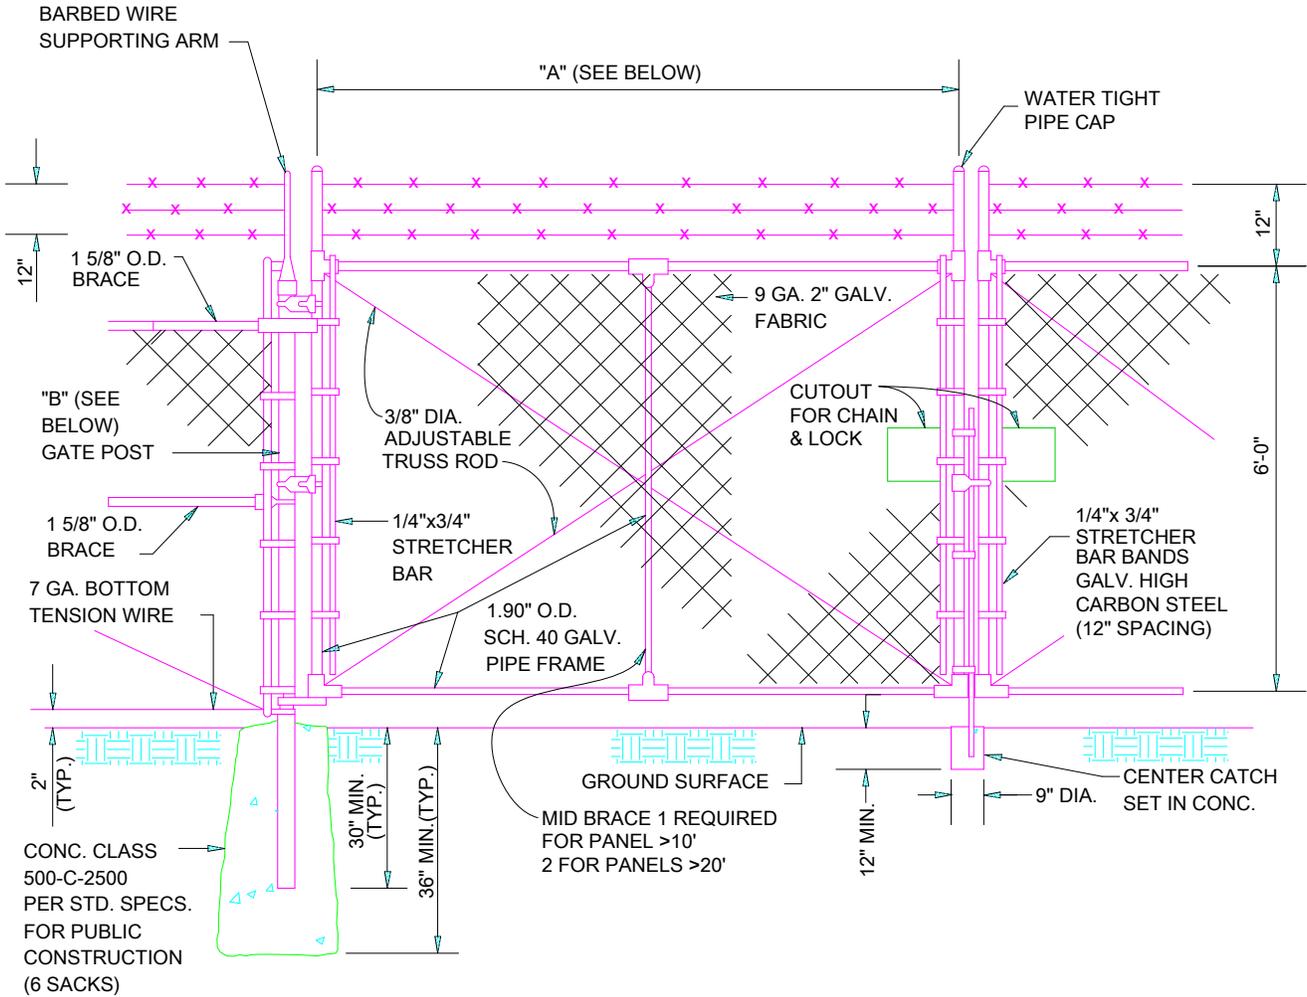

APPROVED DATE: January 1, 2011

*Joseph A. ...*

\_\_\_\_\_  
DIRECTOR OF ENGINEERING

STANDARD DRAWING  
CHAIN LINK GATE DETAIL

STD. DWG. NO.  
W-1591