

SANTA ANA RIVER WATERMASTER

ORANGE COUNTY WATER DISTRICT v. CITY OF CHINO, et al.
CASE NO. 117628--COUNTY OF ORANGE

WATERMASTER

Halla Razak
Douglas D. Headrick
Roy L. Herndon
Michael R. Markus
Craig D. Miller

MAILING ADDRESS

c/o SBVMWD
380 East Vanderbilt Way
San Bernardino CA 92408-3593
Telephone (909) 387-9200
FAX (909) 387-9247

April 30, 2019

To: Clerk of Superior Court of Orange County and all Parties

Re: Watermaster Report for Water Year October 1, 2017 - September 30, 2018

Ladies and Gentlemen:

We have the honor of submitting herewith the Forty-Eighth Annual Report of the Santa Ana River Watermaster. The supporting Basic Data Appendices are bound separately.

The principal findings of the Watermaster for the Water Year 2017-18 are as follows:

At Prado

1	Measured Outflow at Prado	82,554	acre-feet
2	Base Flow at Prado	65,438	acre-feet
3	Annual Weighted TDS in Base and Storm Flows	625	mg/L
4	Annual Adjusted Base Flow	69,528	acre-feet
5	Cumulative Adjusted Base Flow	5,592,323	acre-feet
6	Other Credits (Debits)	0	acre-feet
7	Cumulative Entitlement of OCWD	2,016,000	acre-feet
8	Cumulative Credit	3,616,331	acre-feet
9	One-Third of Cumulative Debit	0	acre-feet
10	Minimum Required Base Flow in 2017-18	34,000	acre-feet

At Riverside Narrows

1	Base Flow at Riverside Narrows	28,378	acre-feet
2	Annual Weighted TDS in Base Flow	662	mg/L
3	Annual Adjusted Base Flow	28,378	acre-feet
4	Cumulative Adjusted Base Flow	2,081,891	acre-feet
5	Cumulative Entitlement of IEUA and WMWD	732,000	acre-feet
6	Cumulative Credit	1,349,891	acre-feet
7	One-Third of Cumulative Debit	0	acre-feet
8	Minimum Required Base Flow in 2017-18	12,420	acre-feet

Based on these findings, the Watermaster concludes that there was full compliance with the provisions of the Stipulated Judgment in 2017-18

At the end of the 2017-18 Water Year, Inland Empire Utilities Agency (formerly Chino Basin Municipal Water District) and Western Municipal Water District have a cumulative credit of 3,616,331 acre-feet to their Base Flow obligation at Prado Dam. San Bernardino Valley Municipal Water District has a cumulative credit of 1,349,891 acre-feet to its Base Flow obligation at Riverside Narrows.


The Watermaster continued to exercise surveillance over the many active and proposed projects within the watershed for their potential effect on Base Flow. As annual report was being completed, Watermaster Halla Razak had left IEUA and was unable to sign the report. IEUA is in the process of nominating a new Watermaster.

Sincerely yours,
Santa Ana River Watermaster

By: _____

Halla Razak*

*Unable to sign


Douglas D. Headrick


Roy L. Herndon


Michael R. Markus


Craig D. Miller

**SANTA ANA RIVER WATERMASTER
FOR
ORANGE COUNTY WATER DISTRICT
v. CITY OF CHINO, et al.
CASE NO. 117628 - COUNTY OF ORANGE**

**FORTY- EIGHTH
ANNUAL REPORT
OF THE
SANTA ANA RIVER WATERMASTER
FOR WATER YEAR
OCTOBER 1, 2017 - SEPTEMBER 30, 2018**

APRIL 30, 2019

TABLE OF CONTENTS

	<u>Page</u>
CHAPTER I - WATERMASTER ACTIVITIES AND WATER CONDITIONS	
Introduction	1
Compilation of Basic Data.....	2
Watermaster Determinations	4
Notable Watershed Programs and Activities	8
Upper Area Treated Wastewater Discharges	8
Salt Exports from the Upper Area.....	8
<i>Arundo donax</i> Eradication	8
Chino Groundwater Basin Hydraulic Control	11
Santa Ana River Watermaster Action Team	11
Watermaster Service Expenses.....	12
CHAPTER II - BASE FLOW AT PRADO	
Flow at Prado.....	14
Nontributary Flow.....	14
Releases to San Antonio Creek	14
San Jacinto Watershed Discharge	16
Storm Flow.....	16
Base Flow	16
Water Quality Adjustments	17
Adjustment for State Water Project Flow to San Antonio Creek	17
Adjustment for San Jacinto Watershed Discharge	17
Adjusted Base Flow at Prado.....	18
Entitlement and Credit or Debit.....	18
CHAPTER III - BASE FLOW AT RIVERSIDE NARROWS	
Flow at Riverside Narrows	22
Nontributary Flow.....	22
Base Flow	22
Water Quality Adjustments	24
Adjustment for Nontributary Flow	24
Adjustment for Treated Wastewater Discharges from the Rubidoux Community Services District	24
Adjusted Base Flow at Riverside Narrows	25
Entitlement and Credit or Debit.....	25
CHAPTER IV - HISTORY AND SUMMARY OF THE JUDGMENT	
History of Litigation	27
Summary of Judgment.....	29
Declaration of Rights	29
Physical Solution	29
Obligation at Riverside Narrows	30
Obligation at Prado Dam	30
Other Provisions.....	31
History of the Watermaster Committee Membership	31

TABLE OF CONTENTS (Continued)

LIST OF TABLES

	<u>Page</u>
1 Summary of Findings at Prado.....	5
at Riverside Narrows	6
2 Treated Wastewater Effluent Discharged Above Prado	9
3 High Salinity Water Exported from Santa Ana River Watershed	10
4 Watermaster Service Budget and Expenses.....	12
5 Cost to the Parties and USGS for Measurements which Provide Data Used by the Santa Ana River Watermaster, October 1, 2017 to September 30, 2018	13
6 Components of Flow at Prado Dam for Water Year 2017-18	15
7 Historical Watermaster Findings at Prado Dam.....	20
8 Components of Flow at Riverside Narrows for Water Year 2017-18	23
9 History of Watermaster Committee Membership	32

LIST OF PLATES

(Located at back of report)

1 Santa Ana River Watershed	
2 Santa Ana River Watershed Wastewater Treatment Plants and Salt Export Pipelines	
3 Precipitation at San Bernardino starting in 1934-35	
4 Discharge of Santa Ana River at Prado Dam and San Bernardino Precipitation	
5 Discharge of Santa Ana River below Prado starting in 1934-35	
6 Dissolved Solids in the Santa Ana River below Prado Dam	
7 Discharge of Santa Ana River at Riverside Narrows and San Bernardino Precipitation	
8 Discharge of Santa Ana River at Riverside Narrows starting in 1934-35	

TABLE OF CONTENTS (Continued)

APPENDICES

The following appendices are bound separately and available for review at the office of the Secretary of the Santa Ana River Watermaster.

- A USGS Flow Measurements and Water Quality Records of the Santa Ana River Flows below Prado and at MWD Crossing; USGS Flow Measurements of the Santa Ana River at E Street, of Temescal Creek above Main Street (at Corona), Temescal Creek at Corona Lake “Lee Lake” (near Corona), Cucamonga Creek (near Mira Loma), and Chino Creek at Schaefer Avenue (near Chino)
- B Daily Precipitation Data for San Bernardino
- C Santa Ana River Watermaster Statement of Assets and Liabilities Reviewed by Orange County Water District Accounting Manager
- D Water Quality and Discharge of Water Released by MWDSC to San Antonio Creek Near Upland (Connection OC-59)
- E Water Quality and Discharge from the San Jacinto Watershed
- F Water Quality and Discharge of the Santa Ana River below Prado Dam
- G Water Quality and Flow of Treated Wastewater from Rubidoux Community Services District Discharged below the Riverside Narrows Gaging Station
- H Water Quality and Discharge of the Santa Ana River at Riverside Narrows

CHAPTER I

WATERMASTER ACTIVITIES AND WATER CONDITIONS

Introduction

This Forty-Eighth Annual Report of the Santa Ana River Watermaster covers Water Year 2017-18. The annual report is required by the Stipulated Judgment (Judgment) in the case of Orange County Water District v. City of Chino, et al., Case No. 117628-County of Orange, entered by the court on April 17, 1969. The Judgment became effective on October 1, 1970. It contains a declaration of rights of the water users and other entities in the Lower Area of the Santa Ana River Basin downstream of Prado Dam as against those in the Upper Area tributary to Prado Dam, and provides a physical solution to satisfy those rights. Chapter IV presents a history of the litigation and a summary of the Judgment.

The physical solution accomplishes, in general, a regional intrabasin allocation of the surface flow of the Santa Ana River System. The Judgment leaves to each of the major hydrologic units within the basin the determination and regulation of individual rights therein and the development and implementation of its own water management plan subject only to compliance with the physical solution.

The Judgment designates four public agencies to represent the interests of the Upper and Lower Areas and gives them the responsibility to fulfill the obligations set forth in the Judgment, including the implementation of the physical solution. The Lower Area is represented by Orange County Water District (OCWD). The Upper Area is represented by San Bernardino Valley Municipal Water District (SBVMWD), Western Municipal Water District of Riverside County (WMWD), and Inland Empire Utilities Agency (IEUA), formerly the Chino Basin Municipal Water District (CBMWD). The locations of the districts are shown on Plate 1, "Santa Ana River Watershed".

The court appoints a five-member Watermaster Committee (Watermaster) to administer the provisions of the Judgment. The duties of the Watermaster are to maintain a continuous accounting of each of the items listed in the letter of transmittal at the front of this report and to report thereon annually for each water year to the court and the parties. The water year begins October 1 and ends the following September 30. The time for submission of the annual report was amended by the court (dated December 24, 1981) to be seven months after the end of the water year (April 30).

The Watermaster Committee signing the Water Year 2017-18 Annual Report consisted of Douglas D. Headrick, Roy L. Herndon, Michael R. Markus, and Craig D. Miller. In December 2018, Watermaster Halla Razak left her position as general manager of IEUA and was unavailable to serve as IEUA's representative. Prior to the completion of the Forty-Eighth Annual Report, IEUA hired Mr. Deshmukh as its general manager and submitted his nomination to the court to replace Ms. Razak. At the January 28, 2019 meeting, Mr. Herndon was re-elected Chairman and Mr. Headrick was re-elected Secretary/Treasurer. The history of the Watermaster membership is presented in Chapter IV.

Compilation of Basic Data

The Watermaster annually compiles the basic hydrologic and water quality data necessary to determine compliance with the provisions of the Judgment. The data include records of stream discharge (flow) and quality for the Santa Ana River (River) at Prado Dam and at Riverside Narrows as well as discharges for most tributaries; flow and quality of nontributary water entering the River; rainfall records at locations in or adjacent to the Watershed; and other data that may be used to support the determinations of the Watermaster. For Water Year 2017-18 the United States Geological Survey (USGS) provided discharge and water quality data for the River at two gaging stations, "Santa Ana River Below Prado Dam" (Prado) and "Santa Ana River at Metropolitan Water District (MWD) Crossing" (Riverside Narrows). The discharge data at both stations consist of computed daily mean discharges, expressed in cubic feet per second (cfs), and are based on continuous recordings. At times the USGS must estimate daily mean discharges due to damaged or malfunctioning recording equipment.

The USGS also provided discharge data for other gaging stations for streams tributary to Prado, including, among others, the Santa Ana River at E Street in San Bernardino, Temescal Creek above Main Street in Corona, Cucamonga Creek near Mira Loma, Chino Creek at Schaefer Avenue, Lytle Creek at Colton, Warm Creek near San Bernardino, and San Timoteo Creek near Loma Linda (see Appendix A). Based on a determination by the Watermaster in Water Year 2011-12, the USGS was requested to establish a new gaging station at the spillway at Lee Lake. Expenses associated with the installation and measurements at this gage were added to the Watermaster costs paid by the Parties. Beginning in Water Year 2012-13, the new Temescal Creek at Corona Lake "Lee Lake" (near Corona) gage provided useful data (also included in Appendix A) to assist in the determination of the amount of water discharged from the San Jacinto Watershed that arrived at Prado.

The Water Year 2017-18 daily mean discharge records at Prado are rated "good" by the USGS. Daily mean discharges at the station are controlled at times by storage operations in the reservoir behind Prado Dam just upstream. The maximum and minimum daily mean discharge values during the water year were, respectively, 654 cfs on January 17, 2018 and 38.8 cfs on August 11, 2018. The Water Year 2017-18 daily mean discharge record at Riverside Narrows was rated "poor" by the USGS. The maximum and minimum daily mean discharge values during the year were 251 cfs on March 11, 2018 and 22.7 cfs on July 31, 2018.

The water quality data at Prado consist of daily maximum and minimum and median values for electrical conductivity (EC), measured as specific conductance and expressed in microsiemens per centimeter ($\mu\text{s}/\text{cm}$) based on a continuous recording, and 41 measured values (three to four per month) for EC and/or total dissolved solids (TDS) expressed in milligrams per liter (mg/L). The water quality data at Riverside Narrows consist of 24 values measured by the USGS (generally twice per month) and 54 values measured by the City of Riverside (generally one per week) for both EC and TDS. The maximum and minimum, daily, flow-weighted median EC values reported by the USGS for the River at Prado were 1,290 $\mu\text{s}/\text{cm}$ on August 12, 2018 and 386 $\mu\text{s}/\text{cm}$ on January 9, 2018, respectively. The

corresponding calculated TDS concentrations were 774 and 231 mg/L. At Riverside Narrows, the maximum and minimum EC values were 1,193 $\mu\text{s}/\text{cm}$ on August 15, 2018, reported by the City of Riverside and 444 $\mu\text{s}/\text{cm}$ on January 10, 2018, reported by the USGS. The corresponding measured TDS concentrations were 668 and 288 mg/L. Specific conductance records are affected by releases from Prado Dam. Interruptions in record occur at times due to malfunction of recording or sensing equipment. A portion of chemical data collected for the National Water-Quality Assessment (NAWQA) Program. There were interruptions in the Prado EC records on September 26 and 27, 2018 due to malfunction of recording or sensing equipment.

To assist in making its determinations each year the Watermaster refers to the records of many precipitation stations located in or near the Santa Ana River Watershed. The record for the former Perris Hill Station 163 in the Bunker Hill-San Timoteo area, operated by the San Bernardino County Flood Control District, was used to define the hydrologic base period for the physical solution in the Judgment. The record for San Bernardino County Department of Public Works (SBCDPW) Station 2146, which was located very near to Station 163 at the San Bernardino County Hospital, was used until Water Year 2000-01 in the Annual Reports of the Watermaster to provide a comparison with historical conditions.

During Water Year 2000-01 Station 2146 was destroyed when the hospital buildings were demolished. For several years, the Watermaster used estimated precipitation data based on the records for three nearby stations. The SBCDPW established a new station, Station 2146-A, near the location of the former Station 2146. During the preparation of the report for Water Year 2004-05, the precipitation total recorded at Station 2146-A was sufficiently close to the estimate prepared from the three nearby stations that the Watermaster used the record for Station 2146-A.

The USGS established a precipitation gage network during the Water Year 2003-04 to assist local flood control agencies with flood prediction in the area of the "Old Fire", which burned a large portion of the northerly mountains of the Santa Ana River Watershed area during October and November 2003. When the flood control agencies declined to fund the ongoing operation of the precipitation gage network, the Parties to the Judgment agreed to add the precipitation gage program to the ongoing stream gage program. The Parties also added a gage designated as "Gilbert Street Precipitation Gage" (USGS No. 340742117161701) at the same location as SBCDPW Station 2146-A. The Gilbert Street Gage was placed into operation in October 2005.

The Watermaster has compared the record from the USGS Gilbert Street Gage to the record from the Station 2146-A gage and has found them to be virtually identical. The Watermaster has accepted the Gilbert Street Gage in this report as the most accurate and reliable of the two gages. Because of the Watermaster's finding of suitability of the Gilbert Street Gage, in Water Year 2011-12 the Parties determined that funding of the other precipitation gages was no longer a necessary Watermaster expense.

For Water Year 2017-18, the total precipitation recorded at the Gilbert Street gage was 6.81 inches, or 38% of the average of 17.98 inches that occurred during the 26-year base

period (1934-35 through 1959-60) that was used in the formulation of the physical solution. Plate 3 graphically portrays the annual precipitation from 1934-35 through 2017-18.

Watermaster Determinations

Each year the Watermaster uses its long-established procedures to analyze the basic hydrologic and water quality data in order to determine, at Riverside Narrows and at Prado, the Base Flow, the Adjusted Base Flow, the Cumulative Credits or Debits to Upper Area parties, and the Minimum Required Base Flow for the following water year. The procedures include determining, for both locations, the amounts of Nontributary Flow or other non-storm flow to be excluded from Base Flow.

During Water Year 2017-18 there were no sources of Nontributary Flow in the River at Riverside Narrows or Prado Dam.

The determinations of the Watermaster for Water Year 2017-18 are explained in detail for Prado in Chapter II and for Riverside Narrows in Chapter III. A summary of the annual determinations by the Watermaster is presented in Table 1 for both locations for the period of 1970-71 through 2017-18. Note that the Base Flow obligations set forth in the Judgment at both Prado and Riverside Narrows have been met for the water year and cumulative credits have accrued to the upper respective Districts.

TABLE 1
SUMMARY OF FINDINGS AT PRADO

Water Year	Rainfall (in) ⁽¹⁾	USGS Measured Flow (ac-ft)	Total Flow (ac-ft) ⁽²⁾	Base Flow (ac-ft) ⁽³⁾	Weighted TDS (mg/L) ⁽⁴⁾	Adjusted Base Flow (ac-ft)	Cumulative Credit (ac-ft) ⁽⁵⁾
1971-72	9.62	51,743	51,743	40,416	707	40,416	-5,182
1972-73	18.46	76,848	77,484	48,999	638	51,531	4,349
1973-74	12.72	128,436	62,511	43,106	633	45,513	7,862
1974-75	13.49	93,397	61,855	50,176	694	51,263	17,125
1975-76	15.86	120,590	59,209	45,627	635	48,098	23,223
1976-77	11.95	72,278	62,953	48,387	660	50,000	31,223
1977-78	30.47	255,043	252,850	58,501	383	73,955	63,178
1978-79	17.51	145,198	134,506	71,863	580	79,049	100,227
1979-80	30.93	536,174	527,760	82,509	351	106,505	164,732
1980-81	10.45	118,300	117,888	74,875	728	74,875	205,652
1981-82	18.34	143,702	143,367	81,548	584	89,431	253,083
1982-83	32.36	426,273	426,750	111,692	411	138,591	353,036
1983-84	10.81	178,730	177,606	109,231	627	115,876	431,514
1984-85	12.86	163,247	162,912	125,023	617	133,670	523,184
1985-86	17.86	196,900	197,373	127,215	567	141,315	622,499
1986-87	8.08	140,872	143,191	119,848	622	127,638	708,137
1987-88	13.78	176,292	166,818	124,104	582	136,308	802,445
1988-89	12.64	159,659	152,743	119,572	583	131,230	891,675
1989-90	8.53	144,817	143,463	119,149	611	127,986	977,661
1990-91	15.48	195,186	186,426	111,151	514	128,379	1,064,040
1991-92	16.54	198,280	189,677	106,948	499	124,862	1,146,902
1992-93	30.92	571,138	566,630	128,067	368	163,499	1,268,401
1993-94	11.62	159,560	152,808	111,186	611	119,432	1,345,833
1994-95	25.14	429,270	422,816	123,468	415	152,792	1,458,387
1995-96	11.92	217,160	190,553	131,861	514	152,299	1,568,686
1996-97	18.64	249,685	198,459	136,676	514	157,861	1,684,547
1997-98 ⁽⁶⁾	33.41	462,646	456,316	155,711	392	195,677	1,838,224
1998-99	8.02	184,998	182,310	158,637	581	174,369	1,970,593
1999-00	11.09	207,850	188,538	148,269	527	169,644	2,098,237
2000-01	16.13	222,559	208,535	153,914	525	176,360	2,232,597
2001-02	5.08	174,968	156,596	145,981	587	159,728	2,350,325
2002-03	16.22	256,157	245,947	146,113	463	174,970	2,484,182
2003-04 ⁽⁷⁾	10.80	214,102	201,967	143,510	502	167,190	2,609,619
2004-05	29.89	638,513	637,568	154,307	348	199,570	2,769,555
2005-06	13.23	247,593	246,101	147,736	517	170,266	2,901,383
2006-07	4.61	156,147	153,823	129,830	604	140,216	3,005,130
2007-08	13.70	199,690	194,309	116,483	495	136,382	3,103,677
2008-09	10.14	162,698	161,026	102,711	527	117,519	3,181,385
2009-10	17.79	243,776	243,690	103,099	443	125,179	3,266,053
2010-11 ⁽⁷⁾	23.50	324,892	313,018	102,031	522	117,166	3,342,412
2011-12	9.01	121,123	121,123	93,068	597	101,056	3,401,833
2012-13	9.53	100,003	99,735	81,452	621	86,814	3,446,890
2013-14	12.42	86,486	86,486	63,536	582	69,784	3,474,674
2014-15	11.09	107,600	107,600	64,048	522	73,548	3,506,222
2015-16	8.84	115,023	102,610	71,225	560	79,535	3,543,757
2016-17	21.57	191,539	191,539	70,010	408	87,046	3,588,803
2017-18	6.81	82,554	82,554	65,438	625	69,528	3,616,331

TABLE 1 (Continued)

SUMMARY OF FINDINGS AT RIVERSIDE NARROWS

Water Year	Rainfall (in) ⁽¹⁾	USGS Measured Flow (ac-ft)	Total Flow (ac-ft) ⁽²⁾	Base Flow (ac-ft) ⁽³⁾	Weighted TDS (mg/L) ⁽⁴⁾	Adjusted Base Flow (ac-ft)	Cumulative Credit (ac-ft) ⁽⁵⁾
1971-72	9.62	41,257	22,253	16,157	712	16,017	2,529
1972-73	18.46	33,048	32,571	17,105	700	17,105	4,384
1973-74	12.72	25,494	24,494	16,203	700	16,203	5,337
1974-75	13.49	20,970	19,644	15,445	731	15,100	5,187
1975-76	15.86	27,627	26,540	17,263	723	16,977	6,914
1976-77	11.95	24,871	23,978	18,581	722	18,286	9,950
1977-78	30.47	182,500	181,760	22,360	726	21,941	16,641
1978-79	17.51	47,916	47,298	26,590	707	26,456	27,847
1979-80	30.93	254,333	253,817	25,549	676	25,549	38,146
1980-81	10.45	34,698	34,278	19,764	715	19,550	42,446
1981-82	18.34	83,050	82,708	32,778	678	32,778	59,974
1982-83	32.36	279,987	279,645	57,128	610	57,128	101,852
1983-84	10.81	83,087	82,745	56,948	647	56,948	143,550
1984-85	12.86	79,113	78,771	69,772	633	69,772	198,072
1985-86	17.86	99,600	99,258	68,220	624	68,220	251,042
1986-87	8.08	78,093	77,752	59,808	649	59,808	295,600
1987-88	13.78	80,047	79,706	55,324	620	55,324	335,674
1988-89	12.64	62,717	62,376	52,259	607	52,259	372,683
1989-90	8.53	58,500	58,159	53,199	590	53,583	411,016
1990-91	15.48	74,525	73,790	45,041	616	45,041	440,807
1991-92	16.54	71,768	71,427	40,306	620	40,306	465,863
1992-93	30.92	267,384	267,043	41,434	634	41,434	492,047
1993-94	11.62	45,477	45,006	31,278	677	31,278	508,075
1994-95	25.14	245,617	243,411	45,562	646	45,562	538,387
1995-96	11.92	83,256	81,786	54,548	625	54,548	577,685
1996-97	18.64	107,280	104,518	62,618	624	62,618	625,053
1997-98	33.41	214,375	213,033	65,013	601	65,013	674,816
1998-99	8.02	76,294	76,294	73,094	603	73,094	732,660
1999-00	11.09	75,572	75,572	63,499	602	63,499	780,909
2000-01	16.13	78,091	75,331	61,872	603	61,872	827,531
2001-02	5.08	68,844	59,434	58,705	606	58,705	870,986
2002-03	16.22	92,166	88,502	57,747	617	57,747	913,483
2003-04	10.80	77,336	75,799	54,788	634	54,788	953,021
2004-05	29.89	355,503	355,503	65,760	616	65,760	1,003,531
2005-06	13.23	111,840	111,113	67,161	608	67,161	1,055,442
2006-07	4.61	57,868	56,022	56,123	635	56,123	1,096,315
2007-08 ⁽⁸⁾	13.70	78,619	74,554	46,776	674	46,776	1,127,841
2008-09	10.14	69,027	67,567	43,902	663	43,902	1,156,493
2009-10	17.79	112,631	112,631	45,887	643	45,887	1,187,130
2010-11	23.50	174,075	174,075	49,753	654	49,753	1,221,633
2011-12	9.01	45,049	45,049	42,641	664	42,641	1,249,024
2012-13	9.53	41,337	41,337	36,407	662	36,407	1,270,181
2013-14	12.42	42,766	42,766	32,313	646	32,313	1,287,244
2014-15	11.09	41,958	41,958	28,302	630	28,302	1,300,296
2015-16	8.84	41,007	41,007	30,877	635	30,877	1,315,923
2016-17	21.57	83,601	83,601	36,090	650	36,090	1,336,763
2017-18	6.81	34,792	34,792	28,378	662	28,378	1,349,891

TABLE 1 (Continued)

- (1) Measured at San Bernardino County Department of Public Works (SBCDPW) Station 2146 (former San Bernardino County Hospital) until Water Year 2000-01. Estimated for that location for Water Years 2000-01 through 2003-04. Measured at SBCDPW Station 2146-A for Water Year 2004-05. Measured at USGS Gilbert Street Precipitation Gage at San Bernardino for Water Year 2005-06. For 2006-07, measured at SBCDPW 2146 from Oct. 1 to Dec. 21 and at USGS Gilbert Street Precipitation Gage for the remainder of the year. Measured at USGS Gilbert Street Precipitation Gage at San Bernardino since Water Year 2007-08.
- (2) As determined by the Watermaster, Total Flow based on Computed Inflow at Prado or measured flow at Riverside Narrows in any year may be exclusive of any Nontributary Flow, Exchange Water or other “water management” flows and, at Prado, may include discharges from Lake Elsinore or the San Jacinto Watershed that reach the Santa Ana River.
- (3) As determined by the Watermaster: (a) Base Flow at Prado in any year is exclusive of Storm Flow and may be exclusive of any Nontributary Flow, Exchange Water or other “water management” flows as well as any discharges from Lake Elsinore or the San Jacinto Watershed that reach the Santa Ana River; (b) Base Flow at Riverside Narrows in any year is exclusive of Storm Flow and may be exclusive of any Nontributary Flow, Exchange Water or other “water management” flows and, beginning in 1979-80, includes wastewater from Rubidoux CSD that is treated at the Riverside Regional WWTP.
- (4) For Base and Storm Flow at Prado and Base Flow only at Riverside Narrows.
- (5) As determined by the Watermaster, Cumulative Credit at Prado in any year may include credit for a portion of any water discharged from Lake Elsinore or the San Jacinto Watershed that reach the Santa Ana River.
- (6) The Base Flow and Adjusted Base flow for Water Year 1997-98 were returned to their originally published values to correct an error in the adjustment to account for San Jacinto Watershed flows arriving at Prado. This correction is also reflected in the Cumulative Credit for this and subsequent years.
- (7) A correction was made for Water Years 2003-04 and 2010-11 in the calculation of Weighted TDS based on an adjustment to account for OC-59 water that arrived at Prado. This correction is reflected in the Weighted TDS and Adjusted Base Flow for these years. This correction is also reflected in the Cumulative Credit for these and subsequent years.
- (8) The Base Flow amount for Water Year 2007-08 at Riverside Narrows was published as 47,760 acre-feet in the Thirty-Eighth Annual Report. The correct amount is 46,776 acre-feet.

Notable Watershed Programs and Activities

Each year when the Watermaster is compiling and analyzing the information it needs to prepare its report to the court, it also takes notice of programs and activities in the Watershed that, while they do not directly enter into the determinations of the Watermaster, do have significant potential to affect River flow or quality. The following are brief descriptions of such items.

Upper Area Treated Wastewater Discharges

Data on treated wastewater discharged in the Upper Area are compiled annually because wastewater is a major contributor to Base Flow in the River. The historical data on treated wastewater discharged are summarized in Table 2. The locations of wastewater treatment plants are shown on Plate 2.

Salt Exports from the Upper Area

High salinity water, mostly from groundwater desalters, is exported from the Upper Area to the ocean through Santa Ana Watershed Project Authority's Santa Ana Regional Interceptor (SARI) in Orange County and Inland Empire Brine Line (IEBL) in San Bernardino and Riverside Counties and IEUA's Non-Reclaimable Wastewater System (NRWS). This salt export helps to protect River water quality and, therefore, helps the Upper Area parties comply with the Judgment. The available historical data on salt export are summarized in Table 3. The SARI/IEBL first went into service in Water Year 1985-86. The NRWS went into service prior to 1970, but records of NRWS flow data are only available beginning with Water Year 1981-82. The locations of the SARI/IEBL and NRWS pipelines are shown on Plate 2.

***Arundo donax* Eradication**

Arundo donax is a non-native species of reed that has invaded many waterways in California. It displaces native vegetation, resulting in undesirable habitat for animals. *Arundo* also consumes water at the rate of about 5.6 acre-feet per acre per year compared to only about 1.9 for native plants, a net water loss of about 3.7 acre-feet per year per acre of *Arundo*. By the early 1990s there were about 10,000 acres of *Arundo* in the Santa Ana River Watershed. In 1997 a consortium of local, state and federal agencies launched a long-term eradication program in the watershed for reasons of both habitat restoration and water savings. *Arundo* spreads quickly downstream as roots and rhizomes break off during high stream flows. Therefore, the eradication program began at the farthest upstream locations and is working toward the River mouth. Each location requires multiyear retreatment. To date the consortium has eradicated 6,000 acres of *Arundo* in the watershed.

**TABLE 2
TREATED WASTEWATER EFFLUENT DISCHARGED ABOVE PRADO
(acre-feet)**

Water Year	Wastewater discharges upstream from Colton that generally do not flow continuously to Santa Ana River above E Street				Wastewater discharges to Santa Ana River and its tributaries that have hydraulic continuity to the Santa Ana River above Riverside Narrows				Wastewater discharges to the Santa Ana River between Riverside Narrows and Prado Dam						Wastewater discharges to Temescal Creek or its tributaries which have hydraulic continuity to the Santa Ana River					Total Discharge to surface flow of the Santa Ana River (B+C+D)	Total Wastewater Discharged in the Watershed (A+B+C+D+1-2)									
	Redlands	Beaumont	Yucaipa	Subtotal (A)	San Bernardino ⁷	Colton	Rialto	RIX ¹	Subtotal (B)	Riverside	Corona ²	Est. EMWD Temescal Elsinore				Subtotal (D) (2+3+4)														
												EMWD Discharge (1)	Arriving at Prado (2)	Valley ⁶ WRP (3)	Valley MWD (4)															
																	IEUA RP 1 ³	IEUA RP 2	IEUA RP 5			IEUA CCWRF ⁴ WRCRW ⁵	Subtotal (C)							
1970-71	2,650	no record	-	2,650	17,860	2,520	2,270	-	22,650	18,620	3,190	-	-	-	-	-	-	-	-	-	21,810	-	-	-	-	-	44,460	47,110		
1971-72	2,830	no record	-	2,830	16,020	2,230	2,400	-	20,650	19,010	3,230	6,740	-	-	-	-	-	-	-	-	-	28,980	-	-	-	-	-	49,630	52,460	
1972-73	2,810	450	-	3,260	18,670	2,530	2,260	-	23,460	19,060	3,340	10,380	-	-	-	-	-	-	-	-	-	32,780	-	-	-	-	-	56,240	59,500	
1973-74	2,770	600	-	3,370	17,680	2,530	2,320	-	22,530	19,560	3,510	11,440	2,320	-	-	-	-	-	-	-	-	36,830	-	-	-	-	-	59,360	62,730	
1974-75	2,540	570	-	3,110	16,750	1,980	2,320	-	21,050	19,340	4,020	14,960	2,280	-	-	-	-	-	-	-	-	40,600	-	-	-	-	-	61,650	64,760	
1975-76	2,450	620	-	3,070	17,250	2,540	2,240	-	22,030	19,580	4,700	15,450	2,950	-	-	-	-	-	-	-	-	42,680	-	-	-	-	-	64,710	67,780	
1976-77	3,170	580	-	3,750	17,650	3,260	2,330	-	23,240	18,770	5,010	14,640	3,380	-	-	-	-	-	-	-	-	41,800	-	-	-	-	-	65,040	68,790	
1977-78	3,280	620	-	3,900	18,590	3,810	2,380	-	24,780	20,310	5,200	14,650	4,060	-	-	-	-	-	-	-	-	44,220	-	-	-	-	-	69,000	72,900	
1978-79	3,740	670	-	4,410	19,040	3,850	3,050	-	25,940	21,070	5,390	15,040	5,070	-	-	-	-	-	-	-	-	46,570	-	-	-	-	-	72,510	76,920	
1979-80	4,190	690	-	4,880	20,360	4,190	2,990	-	27,540	22,910	5,360	14,410	5,520	-	-	-	-	-	-	-	-	48,200	-	-	-	-	-	75,740	80,620	
1980-81	4,410	690	-	5,100	20,550	3,930	3,370	-	27,850	24,180	5,590	17,270	5,260	-	-	-	-	-	-	-	-	52,300	-	-	-	-	-	80,150	85,250	
1981-82	4,420	700	-	5,120	23,340	3,780	3,470	-	30,590	25,640	5,410	19,580	5,360	-	-	-	-	-	-	-	-	55,990	-	-	-	-	-	86,580	91,700	
1982-83	4,530	710	-	5,240	24,160	3,600	3,620	-	31,380	25,020	5,860	20,790	4,290	-	-	-	-	-	-	-	-	55,960	-	-	-	-	-	87,340	92,580	
1983-84	5,150	800	-	5,950	22,080	3,700	3,830	-	29,610	26,090	6,200	20,950	3,950	-	-	-	-	-	-	-	-	57,190	-	-	-	-	-	86,800	92,750	
1984-85	4,990	840	-	5,830	23,270	3,830	4,070	-	31,170	27,750	6,250	25,160	4,280	-	-	-	-	-	-	-	-	63,440	-	-	-	-	-	94,610	100,440	
1985-86	5,200	820	-	6,020	24,720	4,010	4,720	-	33,450	28,820	5,900	28,240	2,660	-	-	-	-	-	-	-	-	65,620	-	-	-	-	-	99,070	105,090	
1986-87	5,780	880	800	7,460	26,810	4,170	5,350	-	36,330	30,340	6,170	27,160	5,000	-	-	-	-	-	-	-	-	68,670	-	-	-	-	-	105,000	112,460	
1987-88	6,060	940	1,850	8,850	27,880	5,240	6,040	-	39,160	34,660	6,050	31,290	5,500	-	-	-	-	-	-	-	-	77,500	-	-	-	-	-	116,660	125,510	
1988-89	5,250	1,030	2,260	8,540	27,640	5,550	6,280	-	39,470	35,490	8,080	35,510	6,180	-	-	-	-	-	-	-	-	85,260	-	-	-	-	-	124,730	133,270	
1989-90	6,360	1,100	2,370	9,830	28,350	5,810	6,260	-	40,420	33,210	9,140	34,760	5,730	-	-	-	-	-	-	-	-	82,840	-	-	-	-	-	123,260	133,090	
1990-91	6,690	1,120	2,490	10,300	27,570	5,670	6,290	-	39,530	32,180	9,110	36,840	6,100	-	-	-	-	-	-	-	-	84,230	-	-	-	-	-	123,760	134,060	
1991-92	6,230	1,150	2,580	9,960	25,060	5,660	6,360	-	37,080	32,660	9,010	40,360	5,780	-	1,550	-	-	-	-	-	-	89,360	-	-	-	-	-	126,440	136,400	
1992-93	6,880	1,180	2,580	10,640	25,550	6,210	6,460	-	38,220	34,100	9,600	41,510	5,640	-	-	-	-	-	-	-	-	95,570	-	-	-	-	-	133,790	144,430	
1993-94	6,440	1,150	2,710	10,300	23,800	5,830	6,540	-	36,170	32,640	7,790	37,310	5,430	-	-	-	-	-	-	-	-	90,180	-	-	-	-	-	126,350	136,650	
1994-95	6,720	1,180	2,560	10,460	26,330	5,500	6,820	-	38,650	33,950	7,340	39,680	5,360	-	-	-	-	-	-	-	-	95,020	-	-	-	-	-	133,670	144,130	
1995-96	6,550	1,260	2,640	10,450	13,240	2,770	6,890	20,760	43,660	33,960	7,850	39,590	4,810	-	-	-	-	-	-	-	-	95,270	-	-	-	-	-	138,930	149,380	
1996-97	6,510	1,280	2,780	10,570	-	-	7,160	42,800	49,960	34,240	5,040	39,940	4,790	-	-	-	-	-	-	-	-	97,500	-	-	-	-	-	143,720	154,290	
1997-98	7,022	1,356	3,116	11,494	-	-	7,063	49,683	56,746	35,422	8,718	44,940	4,969	-	-	-	-	-	-	-	-	104,774	1,779	1,690	-	-	1,690	163,210	174,793	
1998-99	7,379	1,367	3,128	11,874	-	-	6,524	47,587	54,111	34,844	11,629	43,354	5,345	-	-	-	-	-	-	-	-	109,300	-	-	-	3,049	3,049	166,460	178,334	
1999-00	7,670	1,373	3,284	12,327	-	-	7,392	45,012	52,404	35,399	13,152	42,967	4,378	-	-	-	-	-	-	-	-	108,221	-	-	-	-	4,159	4,159	164,784	177,111
2000-01	7,379	1,377	3,345	12,101	-	-	8,346	49,407	57,753	35,663	13,100	43,863	4,401	-	-	-	-	-	-	-	-	110,852	-	-	-	-	4,245	4,245	172,850	184,951
2001-02	7,395	1,434	3,285	12,114	-	-	7,952	44,513	52,465	35,586	12,378	40,377	4,056	-	-	-	-	-	-	-	-	105,454	-	-	-	352	4,477	4,829	162,748	174,862
2002-03	7,499	1,593	3,480	12,572	217	4	8,042	45,570	53,833	36,298	12,027	45,838	4,343	-	-	-	-	-	-	-	-	111,752	2,312	2,024	444	5,012	7,480	173,065	185,925	
2003-04	6,625	1,793	3,898	12,316	124	0	8,158	44,526	52,808	36,664	11,394	39,734	2,307	-	-	-	-	-	-	-	-	106,851	4,345	1,140	549	5,037	6,726	166,386	181,907	
2004-05	7,632	2,051	3,899	13,583	4,406	183	7,815	42,025	54,428	38,123	12,558	40,644	-	-	-	-	-	-	-	-	-	112,260	15,195	13,746	653	7,025	21,424	188,112	203,144	
2005-06	5,789	2,246	3,945	11,981	1,184	101	7,883	45,259	54,427	37,358	13,021	35,486	-	-	-	-	-	-	-	-	-	106,601	14,669	12,631	701	6,259	19,591	180,618	194,637	
2006-07	4,991	2,555	4,056	11,601	10	-	7,654	44,011	51,676	36,355	11,727	31,829	-	-	-	-	-	-	-	-	-	103,672	13,105	11,092	691	4,792	16,575	171,922	185,537	
2007-08	3,665	2,856	4,055	10,576	518	0	7,258	42,476	50,252	35,703	9,408	26,001	-	-	-	-	-	-	-	-	-	97,293	10,808	8,930	811	1,553	11,294	158,839	171,293	
2008-09	2,386	2,894	3,993	9,273	263	0	6,724	40,311	47,299	33,636	9,062	23,854	-	-	-	-	-	-	-	-	-	91,557	6,669	4,653	948	518	6,119	144,975	156,264	
2009-10	2,876	2,956	4,105	9,937	298	-	6,658	40,672	47,628	33,731	8,808	21,983	-	-	-	-	-	-	-	-	-	85,978	4,961	4,814	934	876	6,624	140,231	150,315	
2010-11	3,271	3,050	4,196	10,516	1,292	-	6,710	39,333	47,335	33,487	9,275	18,177	-	-	-	-	-	-	-	-	-	80,690	5,680	5,418	622	4,464	10,504	138,529	149,308	
2011-12	3,503	3,054	4,112	10,669	76	-	6,703	37,966	44,745	31,622	9,249	14,563	-	-	-	-	-	-	-	-	-	84,164	1,225	735	507	786	2,027	120,936	132,096	
2012-13	3,652	3,139	4,191	10,982	13	-	6,611	35,390	42,014	31,996	9,406	10,647	-	-	-	-	-	-	-	-	-	69,446	2,727	502	502	650	1,654	113,113	126,321	
2013-14	3,549	3,345	4,133	11,028	175	-	6,527	33,271	39,973	30,302	8,662	9,898	-	-	-	-	-	-	-	-	-	62,058	-	-	-	533	623	1,156	103,187	114,215
2014-15	3,149	3,428	2,920	9,497	-	-	6,285	31,668	37,954	29,673	9,611	11,589	-	-	-	-	-	-	-	-	-	65,644	-	-	-	605	626	1,231	104,828	114,325
2015-16	3,274	3,372	3,765	10,411	15	-	6,420	32,343	38,778	29,074	10,425	12,531	-	-	-	-	-	-	-	-	-	65,405	-	-	-	174	644	818	105,001	115,411
2016-17	3,084	3,645	3,976	10,705	327	-	6,755	35,306	42,387	30,030	8,445																			

TABLE 3
HIGH SALINITY WATER EXPORTED
FROM THE SANTA ANA RIVER WATERSHED

Water Year	Inland Empire Utility Agency Non-Reclaimable Wastewater	Santa Ana Watershed Project Authority Santa Ana Regional Interceptor (SARI) ¹		Total Flow (acre-feet)
	North System (acre-feet)	SARI Flow ² (acre-feet)	Average TDS (mg/L)	
1970-71	NA	---	---	---
1971-72	NA	---	---	---
1972-73	NA	---	---	---
1973-74	NA	---	---	---
1974-75	NA	---	---	---
1975-76	NA	---	---	---
1976-77	NA	---	---	---
1977-78	NA	---	---	---
1978-79	NA	---	---	---
1979-80	NA	---	---	---
1980-81	NA	---	---	---
1981-82	4,236	---	---	4,236
1982-83	4,651	---	---	4,651
1983-84	4,142	---	---	4,142
1984-85	2,346	---	---	2,346
1985-86	2,995	2,791 ³	NA	5,786 ³
1986-87	4,943	2,869 ³	NA	7,813 ³
1987-88	5,177	2,948 ³	NA	8,125 ³
1988-89	5,949	3,622 ³	NA	9,572 ³
1989-90	5,240	7,393	1,649	12,633
1990-91	2,847	7,340	1,906	10,187
1991-92	3,421	6,457	2,346	9,878
1992-93	3,774	5,277	2,516	9,051
1993-94	3,764	7,860	2,302	11,624
1994-95	4,131	8,656	1,903	12,787
1995-96	3,863	9,597	2,175	13,460
1996-97	4,191	10,225	2,292	14,417
1997-98	4,575	8,210	2,456	12,785
1998-99	3,666	4,305	2,611	7,971
1999-00	4,272	7,711	2,154	11,983
2000-01	5,075	8,205	2,504	13,280
2001-02	4,297	8,385	3,289	12,682
2002-03	3,926	9,331	3,482	13,257
2003-04	3,950	10,505	3,798	14,455
2004-05	4,220	10,971	3,460	15,191
2005-06	5,085	12,847	4,118	17,932
2006-07	4,609	13,168	4,120	17,777
2007-08	4,658	12,123	4,986	16,781
2008-09	4,284	12,993	5,037	17,277
2009-10	3,865	13,325	5,003	17,190
2010-11	3,443	13,282	5,066	16,725
2011-12	3,668	13,471	5,884	17,139
2012-13	3,862	12,061	5,626	15,923
2013-14	4,190	12,185	5,350	16,375
2014-15	4,063	12,056	5,460	16,119
2015-16	4,110	11,396	5,364	15,506
2016-17	4,324	11,957	5,361	16,281
2017-18	4,410	11,520	5,626	15,930

1. Santa Ana Regional Interceptor began operation in 1985-86.
2. IEUA Non-Reclaimable Wastewater from the South System goes into the SARI and is included in SARI Flow.
3. SARI flow and Total Flow for 1985-86 through 1988-89 is partial flow.

NA = Data Not Available

Chino Groundwater Basin Hydraulic Control

During most of the twentieth century much of the land overlying the Chino Basin was devoted to irrigated agriculture that obtained its water supply directly from the basin. In more recent times the agriculture is being replaced by urban development, but the agricultural water use left behind a legacy of high concentrations of nitrates and other salts in the groundwater, making it unsuitable for urban use unless treated. As agricultural pumping of groundwater in the lower part of the Basin was cut back, the California Regional Water Quality Control Board, Santa Ana Region (“RWQCB”), and OCWD both became concerned about the outlook for increased amounts of poor quality water rising in the Santa Ana River above Prado Dam.

Under historic anti-degradation water quality standards, the recharge of recycled water in the Chino Basin was impossible because the Basin lacked assimilative capacity. In order to allow for the use and recharge of recycled water, the RWQCB amended the Basin Plan for the Santa Ana Watershed to allow for the use of special “maximum benefit” standards. As a condition of approval of the use of the maximum benefit standards, the RWQCB’s Water Quality Control Plan requires that the Chino Basin entities develop and implement a Hydraulic Control Program with the dual objectives of minimizing the loss of groundwater to the River and protecting the River against the salts by increasing pumping from wells low in the Basin. Much of the pumped groundwater is treated in desalination facilities, with the product water being served to municipalities and the brine stream being exported to the ocean via the SARI/IEBL.

The Chino Basin Watermaster files an annual report with RWQCB on the program, water chemistry, hydrologic balance, piezometric groundwater surface elevations, and groundwater modeling. In February 2016, Chino Basin Watermaster announced that hydraulic control had been achieved.

Watermaster Service Expenses

In accordance with Paragraph 7(d) of the Judgment, the fees and expenses of each of the members of the Watermaster are borne by the parties by whom they were nominated. All other Watermaster service expenses are shared by the parties with OCWD paying 40% of the cost and WMWD, SBVMWD, and IEUA each paying 20% of the cost.

The Watermaster annually adopts a budget for the costs of services other than those provided by the USGS. Table 4 shows the budget and actual expenses incurred for such services during the 2017-18 fiscal year as well as the budget adopted for the 2018-19 fiscal year. A financial review was performed by OCWD and is reported in Appendix C.

TABLE 4

WATERMASTER SERVICE BUDGET AND EXPENSES

Budget Item	July 1, 2017 to June 30, 2018 Budget	July 1, 2017 to June 30, 2018 Expenses	July 1, 2018 to June 30, 2019 Budget
Support Services	\$7,500.00	\$7,900.00	\$9,000.00
Reproduction of Annual Report	<u>1,000.00</u>	<u>\$742.71</u>	<u>1,000.00</u>
TOTAL	\$8,500.00	\$8,642.71	\$10,000.00

Stream flow measurements and water quality data required by the Watermaster are, for the most part, furnished by the USGS through a cooperative monitoring program which also includes some precipitation data to supplement data provided by the USGS and other agencies. The costs of the cooperative monitoring program for Water Year 2017-18, and each party's share of the costs, are set forth in Table 5.

TABLE 5

**COSTS TO THE PARTIES AND USGS FOR MEASUREMENTS
WHICH PROVIDE DATA USED BY THE
SANTA ANA RIVER WATERMASTER**

October 1, 2017 to September 30, 2018

	<u>Total Cost</u>	<u>U.S.G.S. Share</u>	<u>Parties' Share</u>
USGS PRECIPITATION GAGING STATIONS			
Gilbert Street Precipitation Gage at San Bernardino	\$8,950	\$0	\$8,950
Middle Fork Lytle Creek Precipitation	\$5,350	\$5,350	\$0
USGS FLOW AND WATER QUALITY GAGING			
Santa Ana River at MWD Crossing (Riverside Narrows)			
Surface Water Gage	\$32,400	\$10,850	\$21,550
Water Quality Monitoring TDS Sampling	\$13,450	\$4,500	\$8,950
Santa Ana River below Prado Dam			
Surface Water Gage	\$25,550	\$25,550	\$0
Extra Measurements in WY18	\$16,008	\$0	\$16,008
Water Quality Monitoring	\$18,450	\$6,200	\$12,250
Water Quality Monitoring TDS Sampling	\$12,350	\$4,150	\$8,200
Water Quality Conductance Program	\$2,850	\$0	\$2,850
Temescal Creek above Main St., near Corona	\$23,000	\$7,700	\$15,300
Chino Creek at Schaefer Avenue	\$23,000	\$7,700	\$15,300
Cucamonga Creek near Mira Loma	\$23,000	\$7,700	\$15,300
Temescal Creek at Corona Lake near Corona	\$17,150	\$0	\$17,150
TOTAL COST AND SHARES	\$221,508	\$79,700	\$141,808
COST DISTRIBUTION AMONG PARTIES			
Inland Empire Utilities Agency	20%		\$28,362
Orange County Water District	40%		\$56,723
San Bernardino Valley Municipal Water District	20%		\$28,362
Western Municipal Water district	20%		\$28,362

CHAPTER II

BASE FLOW AT PRADO

This chapter deals with determinations of 1) the components of flow at Prado, which include Nontributary Flow, water discharged from San Jacinto Watershed, Storm Flow, and Base Flow and 2) the Adjusted Base Flow at Prado credited to IEUA and WMWD.

Flow at Prado

During Water Year 2017-18, the flow of the River as measured at the USGS gaging station below Prado Dam amounted to 82,554 acre-feet. There was 1 acre-foot of water in storage at the beginning of the Water Year, and 1 acre-foot of water remained in storage at the end of the Water Year. Inflow to the reservoir included 65,438 acre-feet of Base Flow and 17,116 acre-feet of Storm Flow. There were no Nontributary Flows to Prado. There was no San Jacinto Watershed water that reached Prado. The monthly components of flow of the River at Prado Dam for Water Year 2017-18 are listed in Table 6 and are shown graphically on Plate 4. Historical Base and Storm Flows of the River below Prado during Water Years 1934-35 through 2017-18 are presented on Plate 5.

Nontributary Flow

Nontributary Flow includes water that originated outside the watershed and other water that the Watermaster has determined should be excluded from Base Flow. During Water Year 2017-18, there were no Nontributary Flows that were determined to have reached Prado. In the past, Nontributary Flows have included, and may include in the future, other water discharged to the River pursuant to water exchange or other such programs.

Releases to San Antonio Creek

Since May 1973, OCWD has from time to time purchased State Water Project water for the replenishment of the groundwater basin in Orange County. The water has been released at two locations: Santa Ana River above Riverside Narrows (1972-72 only) and San Antonio Creek near the City of Upland. The general procedure used by the Watermaster to account for Nontributary Flows released to San Antonio Creek via OC-59 is fully described in the Twelfth (1981-82) Annual Report. During Water Year 2017-18, there was no water discharged to San Antonio Creek for OCWD via OC-59.

TABLE 6
 COMPONENTS OF FLOW AT PRADO DAM
 WATER YEAR 2017-18
 (acre-feet)

	USGS Measured Outflow	Storage Change (1)	Computed Inflow	San Jacinto Watershed Flow at Prado (2)	San Antonio Creek (3)	Storm Flow	Base Flow
<u>2017</u>							
October	4,800	3	4,803	0	0	0	4,803
November	6,039	(1)	6,038	0	0	0	6,038
December	5,561	1	5,562	0	0	0	5,562
<u>2018</u>							
January	16,607	2	16,609	0	0	9,153	7,456
February	6,958	424	7,382	0	0	509	6,873
March	14,692	(424)	14,268	0	0	6,826	7,442
April	6,487	(4)	6,483	0	0	430	6,053
May	5,663	0	5,663	0	0	183	5,480
June	4,653	(2)	4,651	0	0	0	4,651
July	3,650	0	3,650	0	0	15	3,635
August	3,334	0	3,334	0	0	0	3,334
September	4,110	1	4,111	0	0	0	4,111
Total	82,554	0	82,554	0	0	17,116	65,438

(1) The monthly change in storage is included in the monthly components of flow.

(2) Discharge due to overflow of Lake Elsinore and/or discharge of wastewater by EMWD from the San Jacinto Watershed.

(3) State Water Project water released into San Antonio Creek from turnout OC-59 for OCWD and calculated to have reached Prado this Water Year.

San Jacinto Watershed Discharge

Prior to Water Year 1997-98, discharges from the San Jacinto Watershed reaching Prado Reservoir were due to discharges from Lake Elsinore, and had been accounted for as “Lake Elsinore Discharge.” In 1998, Eastern Municipal Water District (EMWD) completed its Reach 4 discharge pipeline to Wasson Canyon, which is tributary to Temescal Wash. The pipeline discharges tertiary-treated wastewater to Temescal Wash above Lee Lake when flows exceed EMWD’s storage facility capacity. The collective discharges from Lake Elsinore and EMWD to Temescal Wash are referred to herein as San Jacinto Watershed discharges. During Water Year 2017-18, there was no water discharged to Temescal Wash by EMWD.

Storm Flow

Portions of storm flows are retained behind Prado Dam for flow regulation and for water conservation purposes. The United States Army Corps of Engineers (USACE) owns and operates the Dam according to a flow release schedule which allows for water to be captured and subsequently released at rates which can be captured and recharged by OCWD. The Dam has a spillway elevation of 543 feet above mean sea level. On April 12, 1995, the USACE, the United States Fish and Wildlife Service (USFWS), and OCWD reached an agreement to increase the seasonal water conservation pool from elevation 494 to elevation 505 feet after March 1 of each year in exchange for a \$1 million contribution by OCWD to the USFWS to be used to develop least Bell’s vireo habitat by the removal of a non-native plant, *Arundo donax*. In 2006 the USACE and OCWD signed an agreement to increase the winter conservation pool elevation from elevation 494 to 498 in exchange for a \$930,000 contribution from OCWD to habitat restoration in the watershed. Monthly and annual quantities of Storm Flow are shown in Table 6.

During Water Year 2017-18, the maximum volume of water stored in Prado Reservoir reached 5,584 acre-feet on January 11, 2018. The maximum daily mean flow released from Prado Dam to the River during the Water Year was 654 cfs on January 17, 2018.

Base Flow

The Base Flow is that portion of the total flow remaining after subtracting Storm Flow, Nontributary Flow and certain other flows determined by the Watermaster. Flows affecting the determination of Base Flow in Water Year 2017-18 did not include discharges from the San Jacinto Watershed. The general procedure used by the Watermaster to separate the Water Year 2017-18 flow components was the same as used for previous years and is fully described in the Fifth (1974-75) Annual Report. Table 6 shows the monthly and annual quantities of Base Flow.

Water Quality Adjustments

The flow-weighted average TDS for the total flow passing Prado Dam was found to be 625 mg/L. This determination was based on records from a continuous monitoring device operated by the USGS for EC of the River flow below Prado Dam. This record was supplemented by forty-one (41) grab samples for EC collected by the USGS and analyzed for TDS. The TDS and EC data collected on March 14, 2018 (566 mg/L and 1,340 $\mu\text{s}/\text{cm}$) were excluded from the correlation of TDS and EC as they were deemed to be anomalous. Seven other grab samples were analyzed for TDS and not EC.

For Water Year 2017-18 a correlation between TDS and EC yields the following best fit equation:

$$\text{TDS} = \text{EC} \times 0.6040$$

(where the units of TDS and EC are mg/L and $\mu\text{s}/\text{cm}$, respectively)

Using the daily EC data, flow-weighted average daily concentrations for TDS were calculated using the above equation. The plot of TDS on Plate 6 shows the average daily TDS concentration of the River flow passing Prado Dam. A summary of daily TDS and EC of the River below Prado Dam is contained in Appendix F. At Prado Dam, the flow-weighted average annual TDS concentration of 625 mg/L represents the quality of the total flow including releases to San Antonio Creek and discharges from San Jacinto Watershed, if any. The Judgment requires that Base Flow shall be subject to adjustment based on the TDS of Base Flow and Storm Flow only. Hence, a determination of the TDS of Base Flow plus Storm Flow only is detailed in the following paragraphs.

Adjustment for State Water Project Flow to San Antonio Creek

No State Water Project flows discharged to San Antonio Creek reached Prado Dam.

Adjustment for San Jacinto Watershed Discharge

There was no discharge from the San Jacinto Watershed during Water Year 2017-18 reaching Prado Reservoir. Therefore, no water quality adjustment was necessary.

Flow Component	Annual Flow (acre-feet)	Average TDS (mg/L)	Annual Flow X Average TDS
1. Measured Outflow	82,554	625	51,596,250
2. Less Nontributary Flow San Antonio Creek	0	---	---
3. Less San Jacinto Watershed Discharge	0	---	---
4. Measured Outflow less lines 2 and 3	82,554		51,596,250
Average TDS in Total Base and Storm Flow	$51,596,250 \div 82,554 = 625 \text{ mg/L}$		

As shown above, the flow-weighted average annual TDS of Storm Flow and Base Flow for Water Year 2017-18 is 625 mg/L.

Adjusted Base Flow at Prado

The Judgment provides that the amount of Base Flow at Prado received during any year shall be subject to adjustment based on flow-weighted average annual TDS of the Base Flow and Storm Flow at Prado as follows:

If the Weighted Average TDS in Base Flow and Storm Flow at Prado is:	Then the Adjusted Base Flow shall be determined by the formula:
Greater than 800 mg/L	$Q - \frac{35}{42,000} Q(\text{TDS}-800)$
700 mg/L to 800 mg/L	Q
Less than 700 mg/L	$Q + \frac{35}{42,000} Q(700-\text{TDS})$

where Q = Base Flow actually received.

The flow-weighted average annual TDS of 625 mg/L is less than 700 mg/L. Therefore, the Base Flow of 65,438 acre-feet must be adjusted by the above equation for TDS less than 700 mg/L. Thus, the Adjusted Base Flow is as follows:

$$(65,438 \text{ acre-feet}) + \frac{35}{42,000} \times (65,438 \text{ acre-feet}) \times (700 - 625) = 69,528 \text{ acre-feet}$$

Entitlement and Credit or Debit

Paragraph 5(c) of the Judgment states that "CBMWD (now IEUA) and WMWD shall be responsible for an average annual Adjusted Base Flow of 42,000 acre-feet at Prado. CBMWD (IEUA) and WMWD each year shall be responsible for not less than 37,000 acre-feet of Base Flow at Prado, plus one-third of any cumulative debit; provided, however, that for any year commencing on or after October 1, 1986, when there is no cumulative debit, or for any year prior to 1986 whenever the cumulative credit exceeds 30,000 acre-feet, said minimum shall be 34,000 acre-feet."

The Watermaster agreed that San Jacinto Watershed outflows were not envisioned during the formulation of the Judgment and because of the periodic occurrence of San Jacinto Watershed flows at Prado, the Watermaster decided, as in previous years, to credit one-half of any such outflows recharging the groundwater basin in Orange County to IEUA and WMWD.

The findings of the Watermaster concerning flow at Prado for Water Year 2017-18 required under the Judgment are as follows:

1. Measured Outflow at Prado	82,554 acre-feet
2. Base Flow at Prado	65,438 acre-feet
3. Annual Weighted TDS of Base and Storm Flow	625 mg/L
4. Annual Adjusted Base Flow	69,528 acre-feet
5. Cumulative Adjusted Base Flow	5,592,323 acre-feet
6. Other Credits (Debits) ¹	0 acre-feet
7. Cumulative Entitlement of OCWD	2,016,000 acre-feet
8. Cumulative Credit	3,616,331 acre-feet
9. One-Third of Cumulative Debit	0 acre-feet
10. Minimum Required Base Flow in 2017-18	34,000 acre-feet

1. Other Credits (Debits) are comprised of San Jacinto Watershed outflow.

2. Cumulative Credit includes 40,008 acre-feet of San Jacinto Watershed cumulative outflow.

TABLE 7
HISTORICAL WATERMASTER FINDINGS AT PRADO DAM
(acre-feet)

Water Year	Base Flow	Annual Adjusted Base Flow	Cumulative Adjusted Base Flow	Other Credits (Debits) ⁽¹⁾	Cumulative Entitlement of OCWD	Cumulative Credit ⁽²⁾
1970-71	38,402	38,402	38,402	0	42,000	-3,598
1971-72	40,416	40,416	78,818	0	84,000	-5,182
1972-73	48,999	51,531	130,349	0	126,000	4,349
1973-74	43,106	45,513	175,862	0	168,000	7,862
1974-75	50,176	51,263	227,125	0	210,000	17,125
1975-76	45,627	48,098	275,223	0	252,000	23,223
1976-77	48,387	50,000	325,223	0	294,000	31,223
1977-78	58,501	73,955	399,178	0	336,000	63,178
1978-79	71,863	79,049	478,227	0	378,000	100,227
1979-80	82,509	106,505	584,732	0	420,000	164,732
1980-81	74,875	74,875	659,607	8,045	462,000	205,652
1981-82	81,548	89,431	749,038	0	504,000	253,083
1982-83	111,692	138,591	887,629	3,362	546,000	353,036
1983-84	109,231	115,876	1,003,505	4,602	588,000	431,514
1984-85	125,023	133,670	1,137,175	0	630,000	523,184
1985-86	127,215	141,315	1,278,490	0	672,000	622,499
1986-87	119,848	127,638	1,406,128	0	714,000	708,137
1987-88	124,104	136,308	1,542,436	0	756,000	802,445
1988-89	119,572	131,230	1,673,666	0	798,000	891,675
1989-90	119,149	127,986	1,801,652	0	840,000	977,661
1990-91	111,515	128,379	1,930,031	0	882,000	1,064,040
1991-92	106,948	124,862	2,054,893	0	924,000	1,146,902
1992-93	128,067	163,499	2,218,392	0	966,000	1,268,401
1993-94	111,186	119,432	2,337,824	0	1,008,000	1,345,833
1994-95	123,468	152,792	2,490,616	1,762	1,050,000	1,458,387
1995-96	131,861	152,299	2,642,915	0	1,092,000	1,568,686
1996-97	136,676	157,861	2,800,776	0	1,134,000	1,684,547
1997-98 ⁽³⁾	155,711	195,677	2,996,453	0	1,176,000	1,838,224
1998-99	158,637	174,369	3,170,822	0	1,218,000	1,970,593
1999-00	148,269	169,644	3,340,466	0	1,260,000	2,098,237
2000-01	153,914	176,360	3,516,826	0	1,302,000	2,232,597
2001-02	145,981	159,728	3,676,554	0	1,344,000	2,350,325
2002-03	146,113	174,970	3,851,524	887	1,386,000	2,484,182
2003-04 ⁽⁴⁾	143,510	167,190	4,018,714	247	1,428,000	2,609,619
2004-05	154,307	199,570	4,218,284	2,366	1,470,000	2,769,555
2005-06	147,736	170,266	4,388,550	3,562	1,512,000	2,901,383
2006-07	129,830	140,216	4,528,766	5,531	1,554,000	3,005,130
2007-08	116,483	136,382	4,665,148	4,165	1,596,000	3,103,677
2008-09	102,711	117,519	4,782,667	2,189	1,638,000	3,181,385
2009-10	103,099	125,179	4,907,846	1,489	1,680,000	3,266,053
2010-11 ⁽⁴⁾	102,031	117,166	5,025,012	1,193	1,722,000	3,342,412
2011-12	93,068	101,056	5,126,068	365	1,764,000	3,401,833
2012-13	81,452	86,814	5,212,882	243	1,806,000	3,446,890
2013-14	63,536	69,784	5,282,666	0	1,848,000	3,474,674
2014-15	64,048	73,548	5,356,214	0	1,890,000	3,506,222
2015-16	71,225	79,535	5,435,749	0	1,932,000	3,543,757
2016-17	70,010	87,046	5,522,795	0	1,974,000	3,588,803
2017-18	65,438	69,528	5,592,323	0	2,016,000	3,616,331

TABLE 7 (Continued)

- (1) Other Credits (Debits) are comprised of San Jacinto Watershed outflow which is the sum of discharge from Lake Elsinore and wastewater discharged by EMWD.
- (2) Cumulative Credit includes 40,008 acre-feet of San Jacinto Watershed cumulative outflow.
- (3) The Base Flow and Adjusted Base Flow for Water Year 1997-98 were returned to their originally published values to correct an error in the adjustment to account for San Jacinto Watershed flow arriving at Prado. This correction is also reflected in the Cumulative Credit for this and subsequent years.
- (4) A correction was made for Water Years 2003-04 and 2010-11 in the calculation of Weighted TDS based on an adjustment to account for OC-59 water that arrived at Prado. This correction is reflected in the Weighted TDS and Adjusted Base Flow for these years. This correction is also reflected in the Cumulative Credit for these and subsequent years.

CHAPTER III

BASE FLOW AT RIVERSIDE NARROWS

This chapter deals with determinations of 1) the components of flow at Riverside Narrows, which include Storm Flow and Base Flow and 2) the Adjusted Base Flow at Riverside Narrows credited to SBVMWD.

Flow at Riverside Narrows

The flow of the River at Riverside Narrows was to 34,792 acre-feet, measured at the USGS gaging station near the MWD Crossing. Separated into its components, Base Flow was 28,378 acre-feet and Storm Flow was 8,590 acre-feet. Included in Base Flow is 2,176 acre-feet of treated wastewater from Rubidoux Community Services District that now bypasses the USGS gaging station. The Storm and Base Flow components of the flow of the River at Riverside Narrows for each month in the Water Year 2017-18 are listed in Table 8 and shown graphically on Plate 7. The components of flow of the River at Riverside Narrows during the period 1934-35 through 2017-18 are presented on Plate 8.

Nontributary Flow

Nontributary Flow includes water that originated outside the watershed, as well as other water that the Watermaster has determined should be excluded from Base Flow. During Water Year 2017-18, no Nontributary Flow was delivered to the River upstream of Riverside Narrows and Prado Dam. In the past, Nontributary Flows have included, and may include in the future, other water discharged to the River pursuant to water exchange or other such programs.

Base Flow

Based on the hydrograph shown on Plate 7 a separation was made between Storm Flow and the sum of Base Flow and Nontributary Flow utilizing in general the procedures reflected in the Work Papers of the engineers (as referenced in Paragraph 2 of the Engineering Appendix of the Judgment).

In April 1980, Rubidoux Community Services District made the first delivery of treated wastewater to the regional treatment plant at Riverside. Prior to that time, Rubidoux had discharged to the River upstream of the Riverside Narrows gaging station. Treated wastewater from Rubidoux during Water Year 2017-18, in the amount of 2,176 acre-feet, has been added to the Base Flow as measured at the gaging station. A summary of Rubidoux discharges is contained in Appendix G.

TABLE 8
 COMPONENTS OF FLOW AT RIVERSIDE NARROWS
 WATER YEAR 2017-18
 (acre-feet)

	Month	USGS Measured Flow	Storm Flow	Rubidoux Waste- water	Base Flow ⁽¹⁾
<u>2017</u>	October	1,849	0	187	2,036
	November	2,164	0	180	2,344
	December	2,318	0	181	2,499
<u>2018</u>	January	8,450	6,042	184	2,592
	February	2,591	135	166	2,622
	March	5,111	2,175	182	3,118
	April	2,596	54	176	2,718
	May	2,364	184	181	2,361
	June	1,871	0	180	2,051
	July	1,845	0	187	2,032
	August	1,825	0	192	2,017
	September	1,808	0	180	1,988
Total		34,792	8,590	2,176	28,378

(1) Base Flow equals USGS measured flow, minus storm flow, minus transferred water (when applicable), plus Rubidoux Wastewater.

Water Quality Adjustments

The determination of water quality at the Riverside Narrows Gaging Station was made using periodic grab samples taken and analyzed for TDS by the USGS and the City of Riverside. A summary of TDS and EC data of the River at Riverside Narrows is contained in Appendix H.

In October 2013, the City of Riverside changed the TDS and EC location for sampling. The new sampling location was further upstream and was not representative of stream flow at the Riverside Narrows. Beginning October 2016, the City of Riverside changed its sampling location and its TDS and EC data are again representative of stream flow at the Riverside Narrows. The City data are thus used in the water quality adjustments for Water Year 2017-18.

Adjustment for Nontributary Flow

During Water Year 2017-18, there was no Nontributary Flow. Therefore, no water quality adjustment was required.

Adjustment for Treated Wastewater Discharges from the Rubidoux Community Services District

The flow-weighted quality of treated wastewater from Rubidoux was 922 mg/L. A monthly summary of discharges and quality is contained in Appendix G.

The Base Flow quality adjustments resulting from exclusion of the Nontributary Flow and inclusion of the Rubidoux treated wastewater are shown in the following table, and resulted in a Base Flow TDS of 662 mg/L.

Flow Component	Annual Flow (acre-feet)	Average TDS (mg/L)	Annual Flow x Average TDS
1. Base Flow plus Nontributary Flow	26,202	640	16,769,280
2. Less Nontributary Flow	0	---	---
3. Plus Rubidoux Treated Wastewater	2,176	922	2,006,272
4. Base Flow (line 1 less line 2 plus line 3)	28,378		18,775,552
Average TDS of Base Flow		$18,775,552 \div 28,378 = 662 \text{ mg/L}$	

Adjusted Base Flow at Riverside Narrows

The Judgment provides that the amount of Base Flow at Riverside Narrows credited during any year shall be subject to adjustment based on weighted average annual TDS in the Base Flow as follows:

If the Weighted Average TDS in Base Flow at Riverside Narrows is:	Then the Adjusted Base Flow shall be determined by the formula:
Greater than 700 mg/L	$Q - \frac{11}{15,250} Q(\text{TDS}-700)$
600 mg/L to 700 mg/L	Q
Less than 600 mg/L	$Q + \frac{11}{15,250} Q(600-\text{TDS})$

where Q = Base Flow actually received.

From the previous subsection, the weighted average annual TDS in the Base Flow at Riverside Narrows for Water Year 2017-18 was 662 mg/L. Therefore, no adjustment is necessary, and the Adjusted Base Flow for Water Year 2017-18 is 28,378 acre-feet.

Entitlement and Credit or Debit

Paragraph 5(b) of the Judgment states that "SBVMWD shall be responsible for an average annual Adjusted Base Flow of 15,250 acre-feet at Riverside Narrows. SBVMWD each year shall be responsible for not less than 13,420 acre-feet of Base Flow plus one-third of any cumulative debit, provided, however, that for any year commencing on or after October 1, 1986, when there is no cumulative debit, or for any year prior to 1986 whenever the cumulative credit exceeds 10,000 acre-feet, said minimum shall be 12,420 acre-feet."

Findings of the Watermaster concerning flow at Riverside Narrows for Water Year 2017-18 required under the Judgment are as follows:

1. Base Flow at Riverside Narrows	28,378 acre-feet
2. Annual Weighted TDS of Base Flow	662 mg/L
3. Annual Adjusted Base Flow	28,378 acre-feet
4. Cumulative Adjusted Base Flow	2,081,891 acre-feet
5. Cumulative Entitlement of IEUA and WMWD	732,000 acre-feet
6. Cumulative Credit	1,349,891 acre-feet
7. One-Third of Cumulative Debit	0 acre-feet
8. Minimum Required Base Flow in 2017-18	12,420 acre-feet

CHAPTER IV

HISTORY AND SUMMARY OF THE JUDGMENT in the case of Orange County Water District v. City of Chino, et al. (Case No. 117628-County of Orange)

History of Litigation

The complaint in the case was filed by Orange County Water District on October 18, 1963, seeking an adjudication of water rights against substantially all water users in the area tributary to Prado Dam within the Santa Ana River Watershed, but excluding the area tributary to Lake Elsinore. Thirteen cross-complaints were filed in 1968, extending the adjudication to include substantially all water users in the area downstream from Prado Dam. With some 4,000 parties involved in the case (2,500 from the Upper Area and 1,500 from the Lower Area), it became obvious that every effort should be made to arrive at a settlement and physical solution in order to avoid enormous and unwieldy litigation.

Efforts to arrive at a settlement and physical solution were pursued by public officials, individuals, attorneys, and engineers. Attorneys for the parties organized in order to facilitate settlement discussions and, among other things, provided guidance for the formation and activities of an engineering committee to provide information on the physical facts.

An initial meeting of the engineers representing the parties was held on January 10, 1964. Agreement was reached that it would be beneficial to undertake jointly the compilation of basic data. Liaison was established with the Department of Water Resources, State of California, to expedite the acquisition of data. Engineers representing the parties were divided into subcommittees which were given the responsibility of investigating such things as the boundary of the Santa Ana River Watershed and its subareas, standardization of the terminology, the location and description of wells and diversion facilities, waste disposal and transfer of water between subareas.

In response to a request from the attorneys' committee at a meeting held April 17, 1964, on April 30, 1964, the joint engineering committee prepared a list of preliminary engineering studies directed toward settlement of the Santa Ana River water rights litigation. Special assignments were made to individual engineers on selected items requested by the attorneys' committee.

The attorneys and engineers for the defendants then commenced a series of meetings separate from the representatives of the plaintiffs in order to consolidate their positions and to determine a course of action. On October 7, 1964, engineers for the defendants presented the results of the studies made by the joint engineering committee. The defendants' attorneys requested that additional information be provided on the methods of measuring flow at Prado Dam, the historical supply and disposal of water passing Prado Dam, segregation of flow into components, and determination of the amount of supply which was usable by the downstream area. On December 11, 1964, the supplemental information was presented to the defendants' attorneys.

During 1965, engineers and attorneys for the defendants held numerous conferences and conducted additional studies in an attempt to determine their respective positions in the case. Early in 1966, the plaintiff and defendants exchanged drafts of possible principles for settlement. Commencing March 22 and ending April 13, 1966, four meetings were held by the engineers to discuss the draft of principles for settlement.

On February 25, 1968, the defendants submitted a request to the Court that the Order of Reference be issued requesting the California Department of Water Resources to determine the physical facts. On May 9, 1968, the plaintiffs' attorney submitted motions opposing the Order of Reference and requested that a preliminary injunction be issued. In the meantime, every effort was being made to come to an agreement on the Judgment. Commencing on February 28, 1968 and extending until May 14, 1968, six meetings were held to determine the scope of physical facts on which agreement could be reached so that if an Order of Reference were to be approved by the Court, the work under the proposed reference would not repeat the extensive basic data collection and compilation which had already been completed and on which engineers for both plaintiffs and defendants had reached substantial agreement. Such basic data were compiled and published in two volumes under date of May 14, 1968, entitled "Appendix A, Basic Data."

On May 21, 1968, an outline of a proposal for settlement of the case was prepared and a committee of attorneys and engineers for the parties commenced preparation of the settlement documents. On June 16, 1968, the Court held a hearing on the motions it had received requesting a preliminary injunction and an Order of Reference. The parties requested that the Court delay the preliminary hearings on these motions in view of the efforts toward settlement that were underway. The plaintiff, however, was concerned regarding the necessity of bringing the case to trial within the statutory limitation and, accordingly, on July 15, 1968, submitted a motion to set the complaint in the case for trial. On October 15, 1968, the trial was commenced and was adjourned after one-half day of testimony on behalf of the plaintiff. Thereafter, the parties filed with the Court the necessary Settlement Documents including a Stipulation for Judgment. The Court entered the Judgment on April 17, 1969, along with Stipulations and Orders dismissing all defendants and cross-defendants except for the four major public water districts overlying, in aggregate, substantially all of the major areas of water use in the watershed. The districts, the locations of which are shown on Plate 1, "Santa Ana River Watershed", are as follows:

- (1) Orange County Water District (OCWD), representing all lower basin entities located within Orange County downstream of Prado Dam.
- (2) Western Municipal Water District (WMWD), representing middle basin entities located within Riverside County on both sides of the Santa Ana River primarily upstream from Prado Dam.
- (3) Inland Empire Utilities Agency (IEUA), formerly Chino Basin Municipal Water District (CBMWD), located in the San Bernardino County Chino Basin area, representing middle basin entities within its boundaries and located primarily upstream from Prado Dam.

- (4) San Bernardino Valley Municipal Water District (SBVMWD), representing all entities within its boundaries, and embraced within the upper portion of the Riverside Basin area, the Colton Basin area (being an upstream portion of the middle basin) and the San Bernardino Basin area, being essentially the upper basin.

Summary of Judgment

Declaration of Rights

The Judgment sets forth a declaration of rights. Briefly stated, the Judgment provides that the water users in the Lower Area have rights, as against the water users in the Upper Area, to receive certain average and minimum annual amounts of non-storm flow (“Base Flow”) at Prado Dam, together with the right to all storm flow reaching Prado Dam. The amount of the Lower Area entitlement is variable based on the quality of the water received by the Lower Area. Water users in the Upper Area have the right as against the water users in the Lower Area to divert, pump, extract, conserve, store and use all surface and groundwater supplies originating within the Upper Area, so long as the Lower Area receives the water to which it is entitled under the Judgment and there is compliance with all of its provisions.

Physical Solution

The Judgment also sets forth a comprehensive “physical solution” for satisfying the rights of the Lower Area. To understand the physical solution, it is necessary to understand the following terms that are used in the Judgment:

Storm Flow – That portion of the total flow which originates from precipitation and runoff and which passes a point of measurement (either Riverside Narrows or Prado Dam) without having first percolated to groundwater storage in the zone of saturation, calculated in accordance with procedures referred to in the Judgment.

Base Flow - That portion of the total surface flow passing a point of measurement (either Riverside Narrows or Prado Dam) which remains after deduction of storm flow, nontributary flows, exchange water purchased by OCWD, and certain other flows as determined by the Watermaster.

Adjusted Base Flow - Actual Base Flow in each year adjusted for water quality pursuant to formulas specified in the Judgment. The adjustment of Base Flow for water quality is intended to provide an incentive to the Upper Area to maintain a better quality of water in the River. When the TDS is lower than a specified value at one of the measuring points, the water quantity obligation is lower. When the TDS is higher than a specified value, the water quantity obligation is higher. This is the first comprehensive adjudication in Southern California in which the quality of water is taken into consideration in the quantification of water rights.

Credits and Debits - Under the accounting procedures provided for in the Judgment, credits accrue to SBVMWD in any year when the Adjusted Base Flow exceeds 15,250

acre-feet at Riverside Narrows and jointly to IEUA and WMWD when the Adjusted Base Flow exceeds 42,000 acre-feet at Prado Dam. Debits accrue in any year when the Adjusted Base Flows falls below those levels. Credits or debits accumulate year to year.

Obligation at Riverside Narrows

SBVMWD has an obligation to assure an average annual Adjusted Base Flow of 15,250 acre-feet at Riverside Narrows, subject to the following:

- (1) A minimum Base Flow of 13,420 acre-feet plus one-third of any cumulative debit.
- (2) After October 1, 1986, if no cumulative debit exists, the minimum Base Flow shall be 12,420 acre-feet.
- (3) Prior to 1986, if the cumulative credits exceed 10,000 acre-feet, the minimum Base Flow shall be 12,420 acre-feet.
- (4) All cumulative debits shall be removed by the discharge of a sufficient Base Flow at Riverside Narrows at least once in any ten consecutive years following October 1, 1976. Any cumulative credits shall remain on the books of account until used to offset any subsequent debits or until otherwise disposed of by SBVMWD.
- (5) The Base Flow at Riverside Narrows shall be adjusted using weighted average annual TDS in such Base Flow in accordance with the formula set forth in the Judgment.

Obligation at Prado Dam

IEUA and WMWD have a joint obligation to assure an average annual Adjusted Base Flow of 42,000 acre-feet at Prado Dam, subject to the following:

- (1) Minimum Base Flow at Prado shall not be less than 37,000 acre-feet plus one-third of any cumulative debit.
- (2) After October 1, 1986, if no cumulative debit exists, the minimum Base Flow quantity shall be 34,000 acre-feet.
- (3) Prior to 1986, if the cumulative credit exceeds 30,000 acre-feet, the minimum Base Flow shall be 34,000 acre-feet.
- (4) Sufficient quantities of Base Flow shall be provided at Prado to discharge completely any cumulative debits at least once in any ten consecutive years following October 1, 1976. Any cumulative credits shall remain on the books of account until used to offset any debits, or until otherwise disposed of by IEUA and WMWD.

- (5) The Base Flow at Prado during any year shall be adjusted using the weighted average annual TDS in the total flow at Prado (Base Flow plus Storm Flow) in accordance with the formula set forth in the Judgment.

Other Provisions

SBVMWD, IEUA and WMWD are enjoined from exporting water from the Lower Area to the Upper Area, directly or indirectly. OCWD is enjoined from exporting or “directly or indirectly causing water to flow” from the Upper Area to the Lower Area. Any inter-basin acquisition of water rights will have no effect on Lower Area entitlements. OCWD is prohibited from enforcing two prior judgments so long as the Upper Area Districts are in compliance with the physical solution. The composition of the Watermaster and the nomination and appointment process for members are described along with a definition of the Watermaster’s duties and a formula for sharing its costs. The court retains continuing jurisdiction over the case. There are provisions for appointment of successor parties and rules for dealing with future actions that might conflict with the physical solution.

History of the Watermaster Committee Membership

The Santa Ana River Watermaster is a committee composed of five members nominated by the parties and appointed by the court. SBVMWD, IEUA (formerly CBMWD), and WMWD nominate one member each and OCWD nominates two. The Watermaster members annually elect a Chairman, Secretary, and Treasurer.

The original five members were appointed at the time of entry of the Judgment. They prepared a *pro forma* annual report for the 1969-70 Water Year. The first annual report required by the Judgment was prepared for the 1970-71 Water Year, and reports have been prepared annually since then.

The membership of the Watermaster has changed over the years. The historical listing of members and officers shown in Table 9 reflects the signatories to each annual report.


TABLE 9
HISTORY OF THE WATERMASTER COMMITTEE MEMBERSHIP

Water Year	SBVMWD	IEUA	WMWD	OCWD	OCWD
1969-70	Clinton O. Henning	William J. Carroll	Albert A. Webb, Secretary	Max Bookman, Chairman	John M. Toups
1970-71 through 1973-74	James C. Hanson	William J. Carroll	Albert A. Webb, Secretary	Max Bookman, Chairman	John M. Toups
1974-75 through 1977-78	James C. Hanson	William J. Carroll	Donald L. Harriger	Max Bookman, Chairman	John M. Toups, Secretary
1978-79 through 1981-82	James C. Hanson	William J. Carroll	Donald L. Harriger	Max Bookman, Chairman	William R. Mills, Jr., Secretary
1982-83 through 1983-84	James C. Hanson	William J. Carroll	Donald L. Harriger	Harvey O. Banks, Chairman	William R. Mills, Jr., Secretary
1984-85 through 1988-89	Robert L. Reiter	William J. Carroll	Donald L. Harriger	Harvey O. Banks, Chairman	William R. Mills, Jr., Secretary
1989-90 through 1994-95	Robert L. Reiter, Secretary/Treasurer	William J. Carroll	Donald L. Harriger	Harvey O. Banks, Chairman	William R. Mills, Jr.
1995-96	Robert L. Reiter, Secretary/Treasurer	William J. Carroll, Chairman	Donald L. Harriger	Bill B. Dendy	William R. Mills, Jr.
1996-97	Robert L. Reiter, Secretary/Treasurer	William J. Carroll	Donald L. Harriger	Bill B. Dendy	William R. Mills, Jr., Chairman
1997-98	Robert L. Reiter, Secretary/Treasurer	Robb D. Quincey	Donald L. Harriger	Bill B. Dendy	William R. Mills, Jr., Chairman
1998-99 through 2000-01	Robert L. Reiter, Secretary/Treasurer	Richard W. Atwater	Donald L. Harriger	Bill B. Dendy	William R. Mills, Jr., Chairman
2001-02 through 2002-03	Robert L. Reiter, Secretary/Treasurer	Richard W. Atwater	Donald L. Harriger, Chairman	Bill B. Dendy	Virginia L. Grebbien
2003-04 through 2005-06	Robert L. Reiter, Chairman/Treasurer	Richard W. Atwater	John V. Rossi	Bill B. Dendy, Secretary	Virginia L. Grebbien
2006-07 through 2007-08	Samuel H. Fuller, Secretary/Treasurer	Richard W. Atwater	John V. Rossi	Bill B. Dendy, Chairman	Craig D. Miller
2008-09	Samuel H. Fuller, Secretary/Treasurer	Richard W. Atwater	John V. Rossi	Robert C. Wagner	Craig D. Miller, Chairman
2009-10	Samuel H. Fuller, Secretary/Treasurer	Thomas A. Love	John V. Rossi, Chairman	Michael R. Markus	Roy L. Herndon
2010-11	Samuel H. Fuller, Secretary/Treasurer	Thomas A. Love, Chairman	John V. Rossi	Michael R. Markus	Roy L. Herndon

TABLE 9 (Continued)
HISTORY OF THE WATERMASTER COMMITTEE MEMBERSHIP

Water Year	SBVMWD	IEUA	WMWD	OCWD	OCWD
2011-12	Samuel H. Fuller, Secretary/Treasurer	Thomas A. Love	John V. Rossi	Michael R. Markus	Roy L. Herndon, Chairman
2012-13 through 2015-16	Douglas D. Headrick, Secretary/Treasurer	P. Joseph Grindstaff	John V. Rossi	Michael R. Markus	Roy L. Herndon, Chairman
2016-17 through 2017-18	Douglas D. Headrick, Secretary/Treasurer	Halla Razak	Craig D. Miller	Michael R. Markus	Roy L. Herndon, Chairman


Santa Ana River Watershed Wastewater Treatment Plants and Salt Export Pipelines

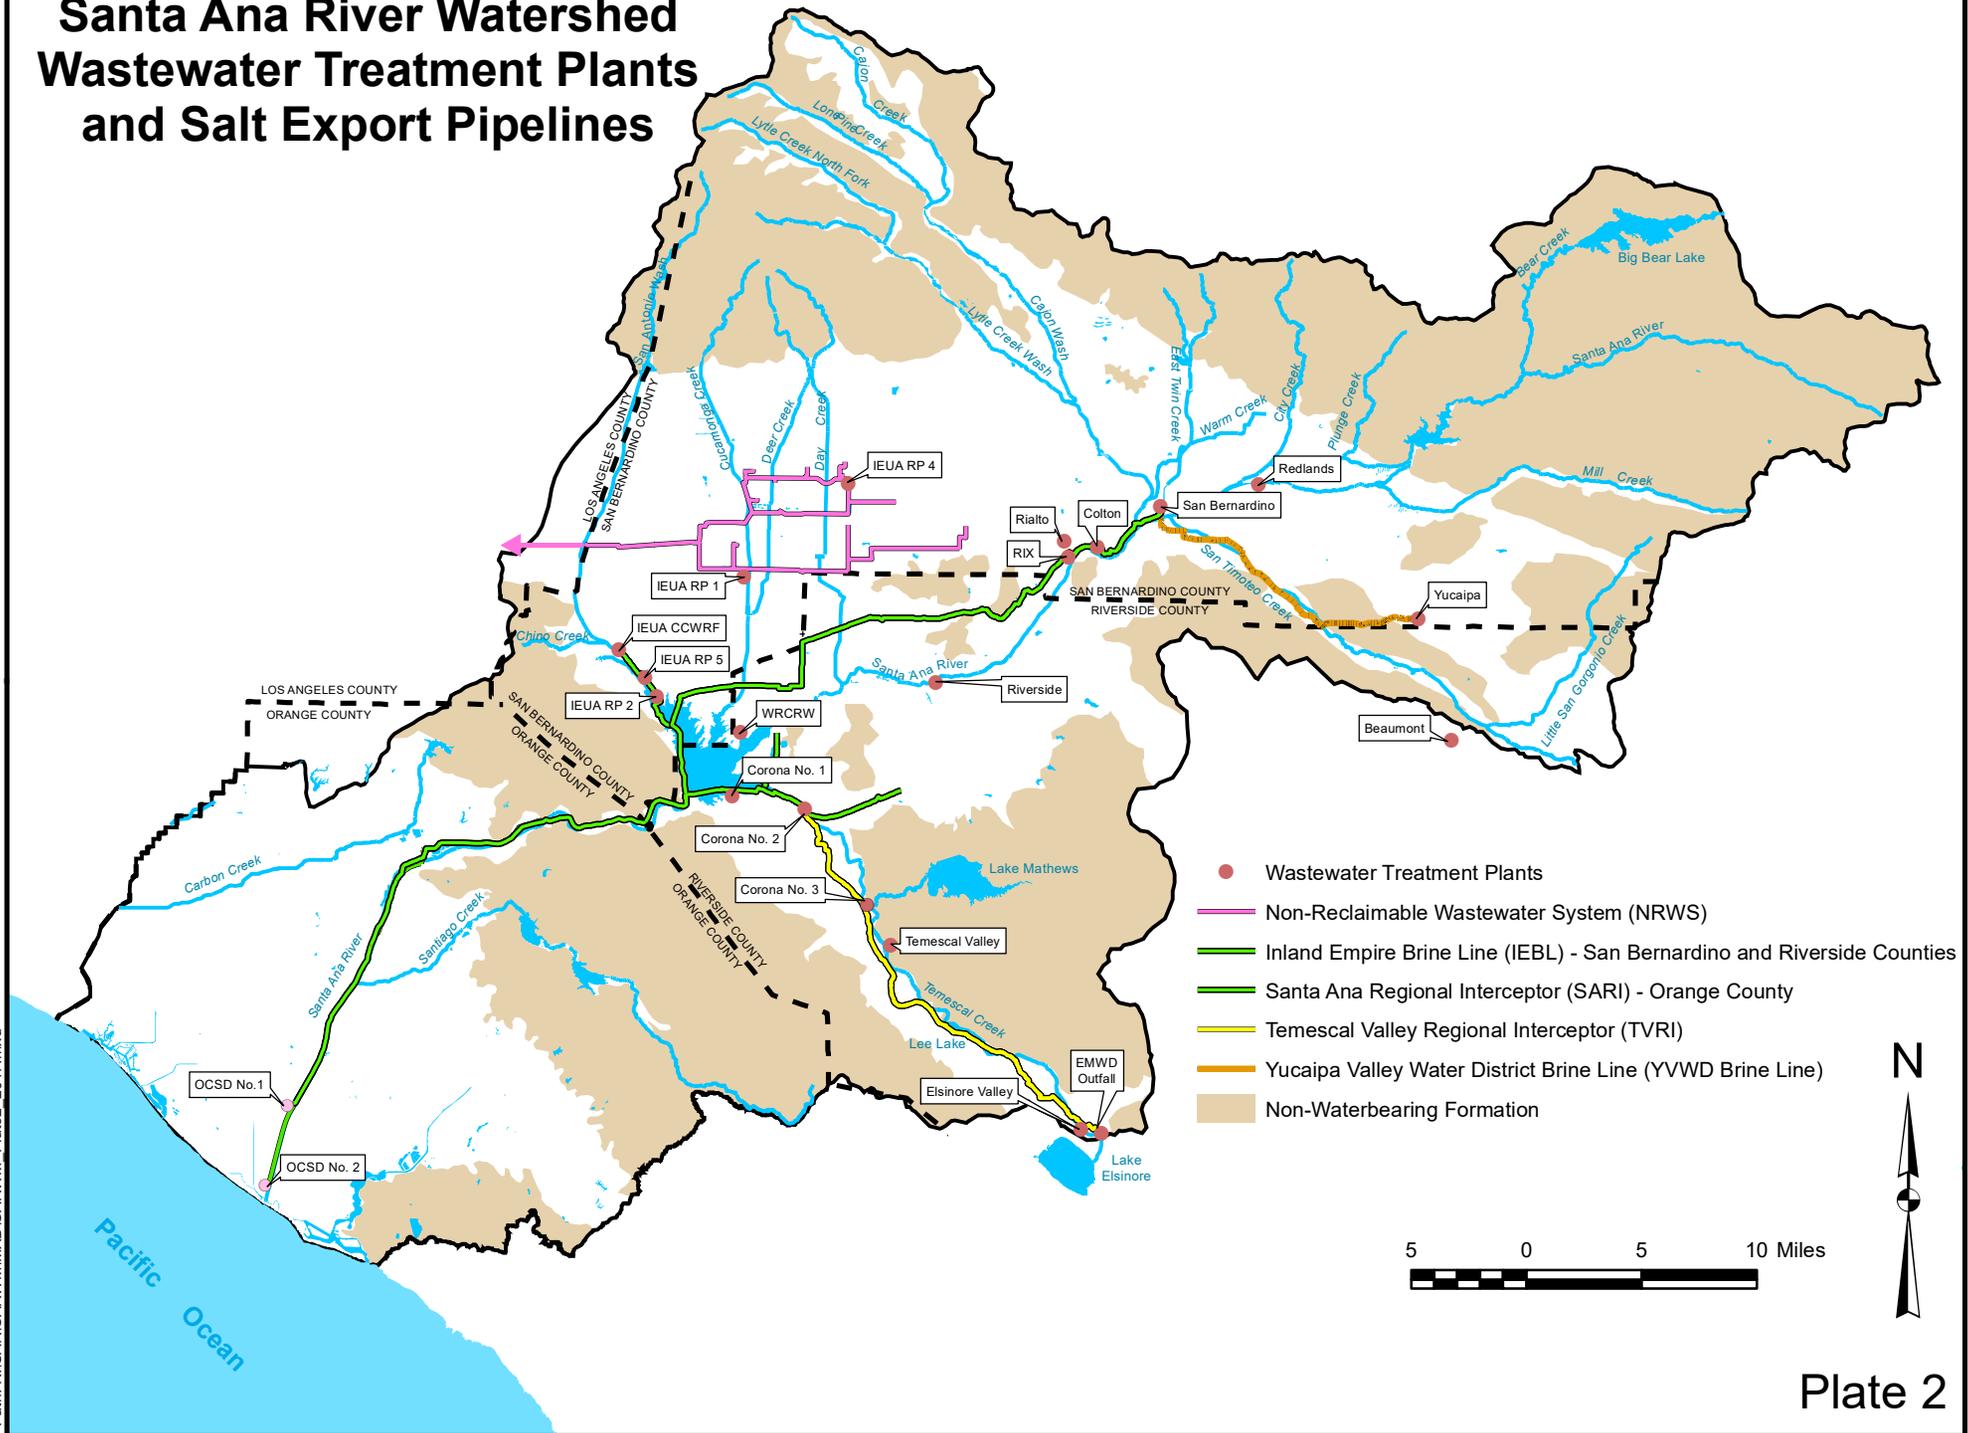

- Wastewater Treatment Plants
- Non-Reclaimable Wastewater System (NRWS)
- Inland Empire Brine Line (IEBL) - San Bernardino and Riverside Counties
- Santa Ana Regional Interceptor (SARI) - Orange County
- Temescal Valley Regional Interceptor (TVRI)
- Yucaipa Valley Water District Brine Line (YVWD Brine Line)
- Non-Waterbearing Formation




PRECIPITATION AT SAN BERNARDINO STARTING WITH 1934-35


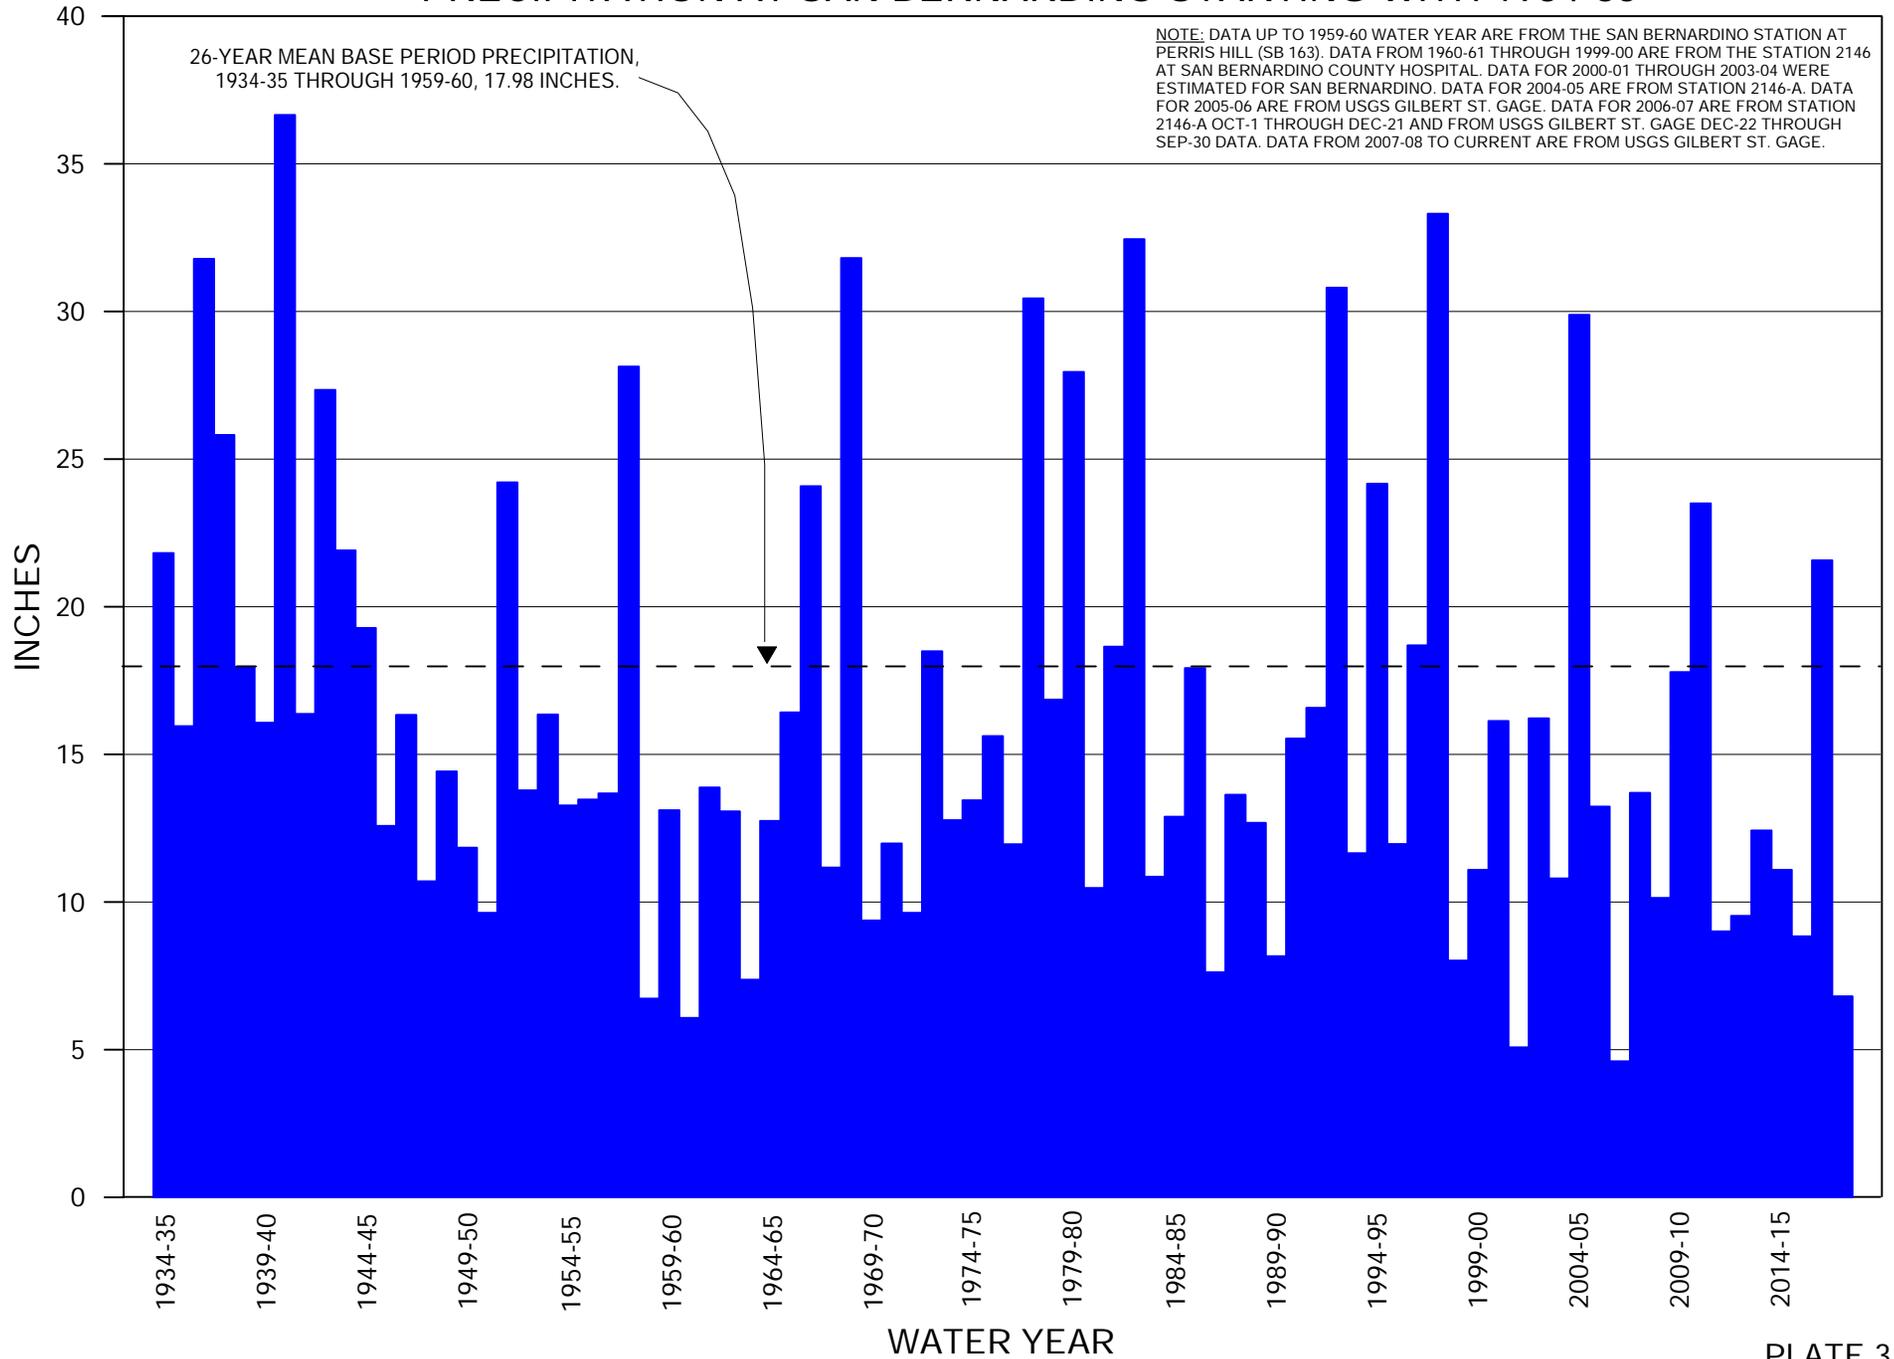






**DISCHARGE OF THE SANTA ANA RIVER AT PRADO DAM & SAN BERNARDINO PRECIPITATION
WATER YEAR 2017-18**

DISCHARGE OF SANTA ANA RIVER AT PRADO STARTING WITH 1934-35

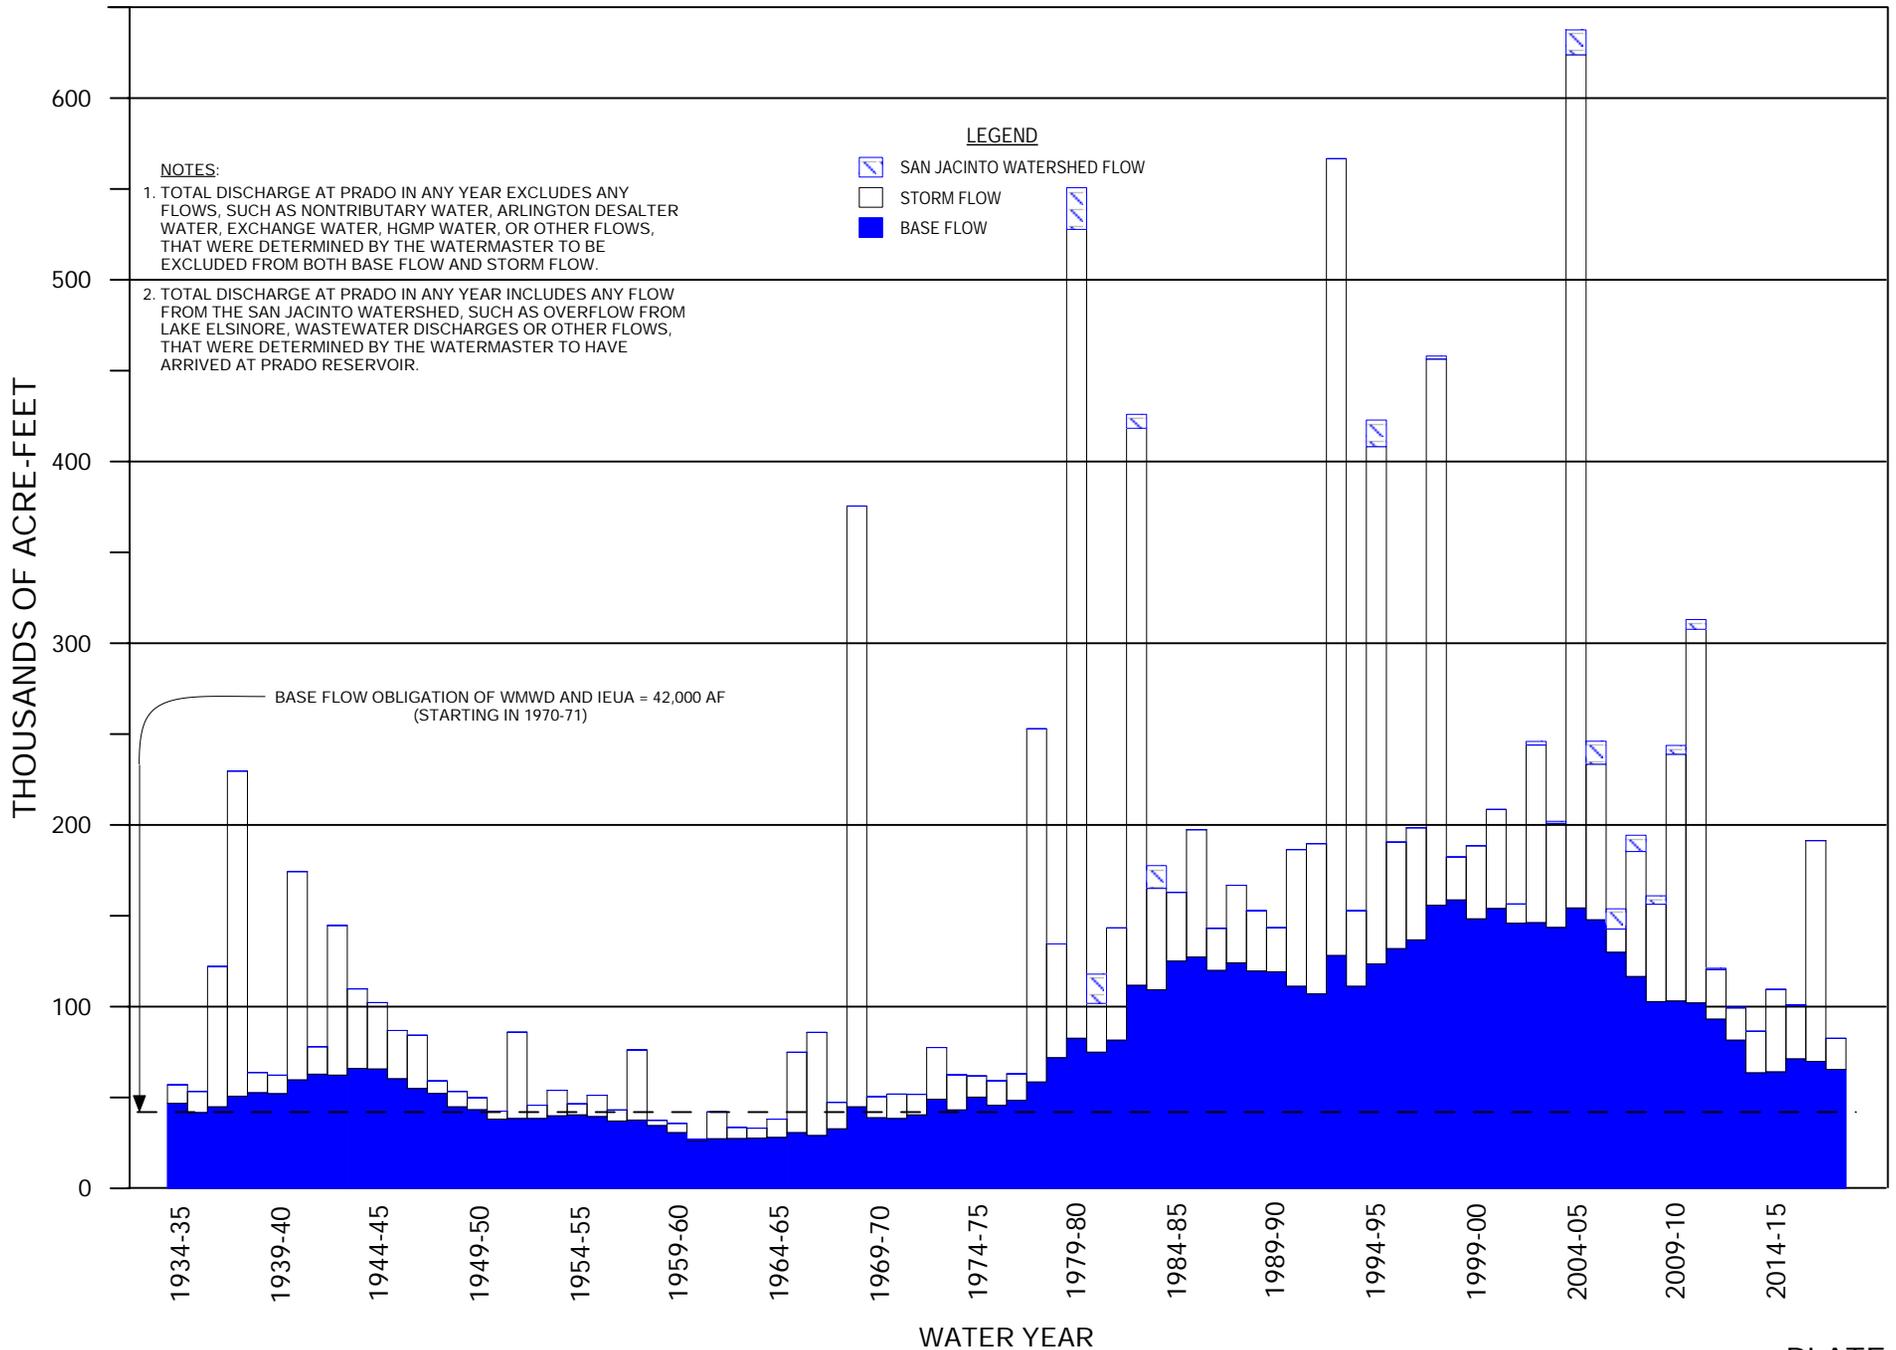

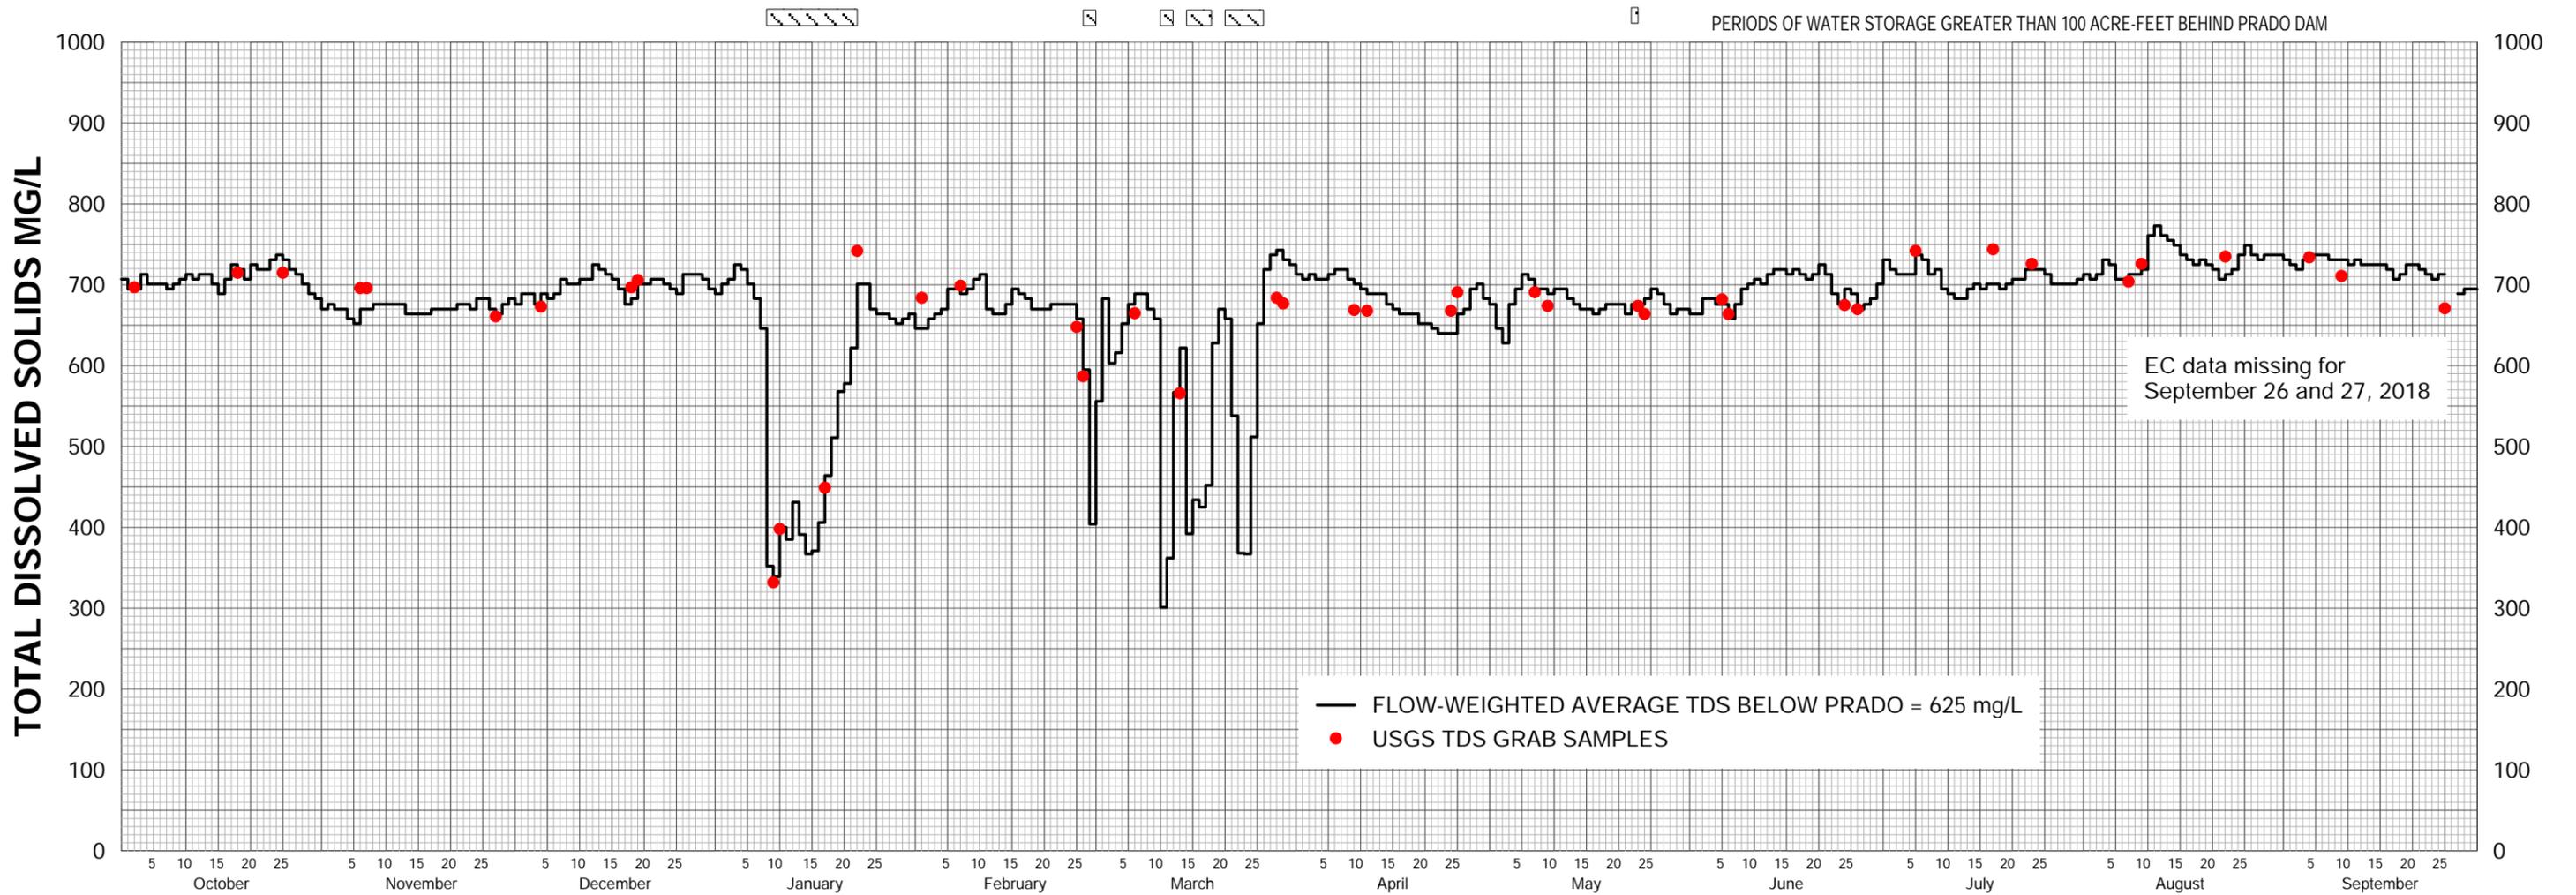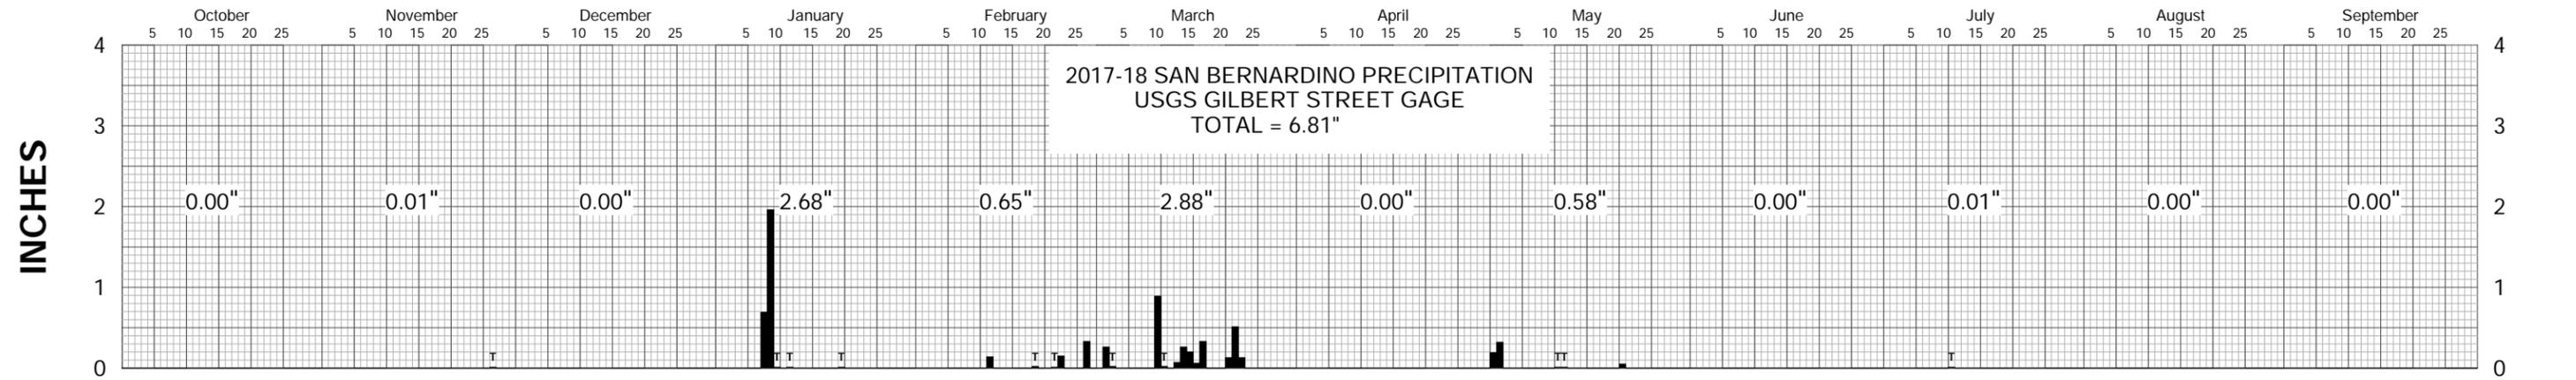

**DISSOLVED SOLIDS IN SANTA ANA RIVER BELOW PRADO DAM
WATER YEAR 2017-18**

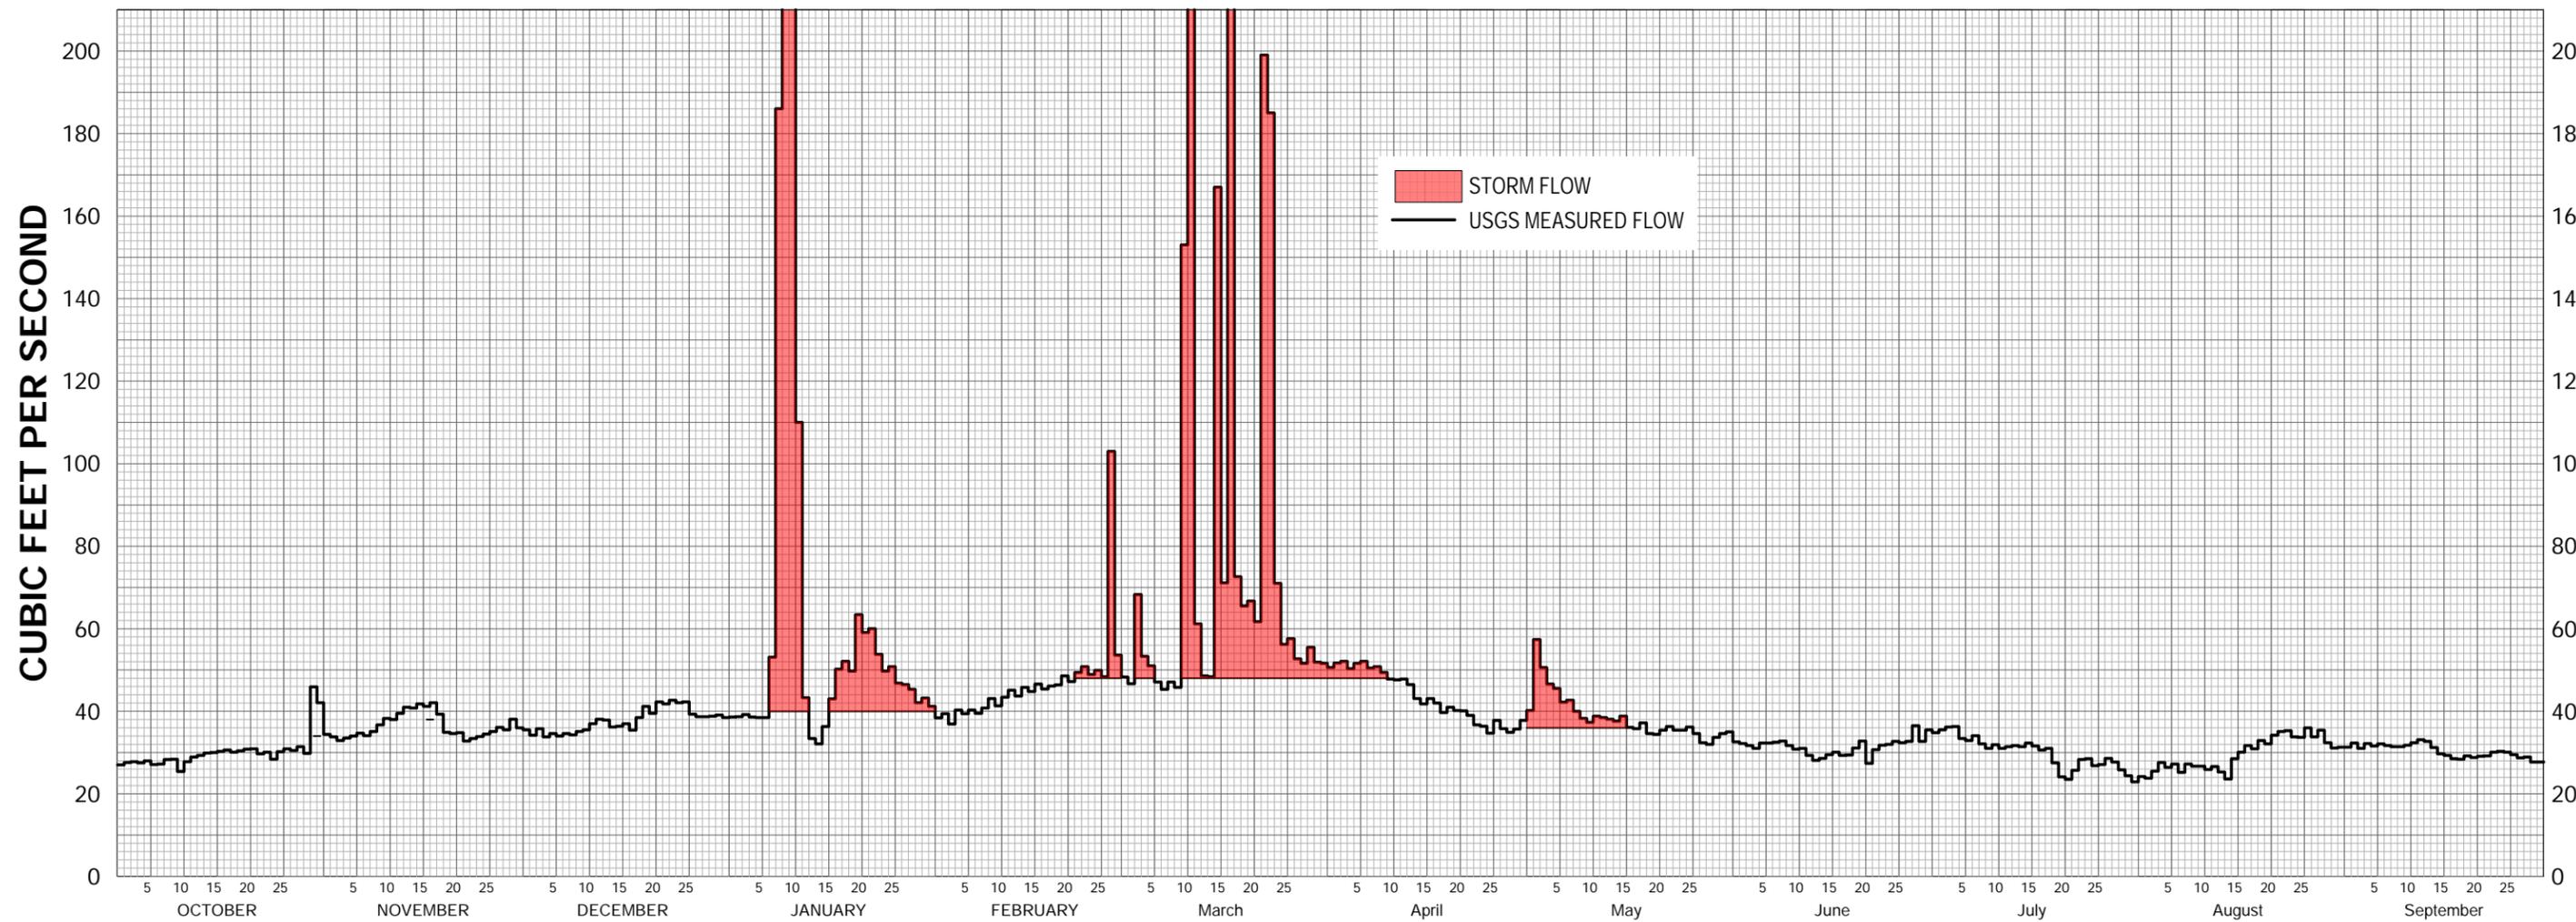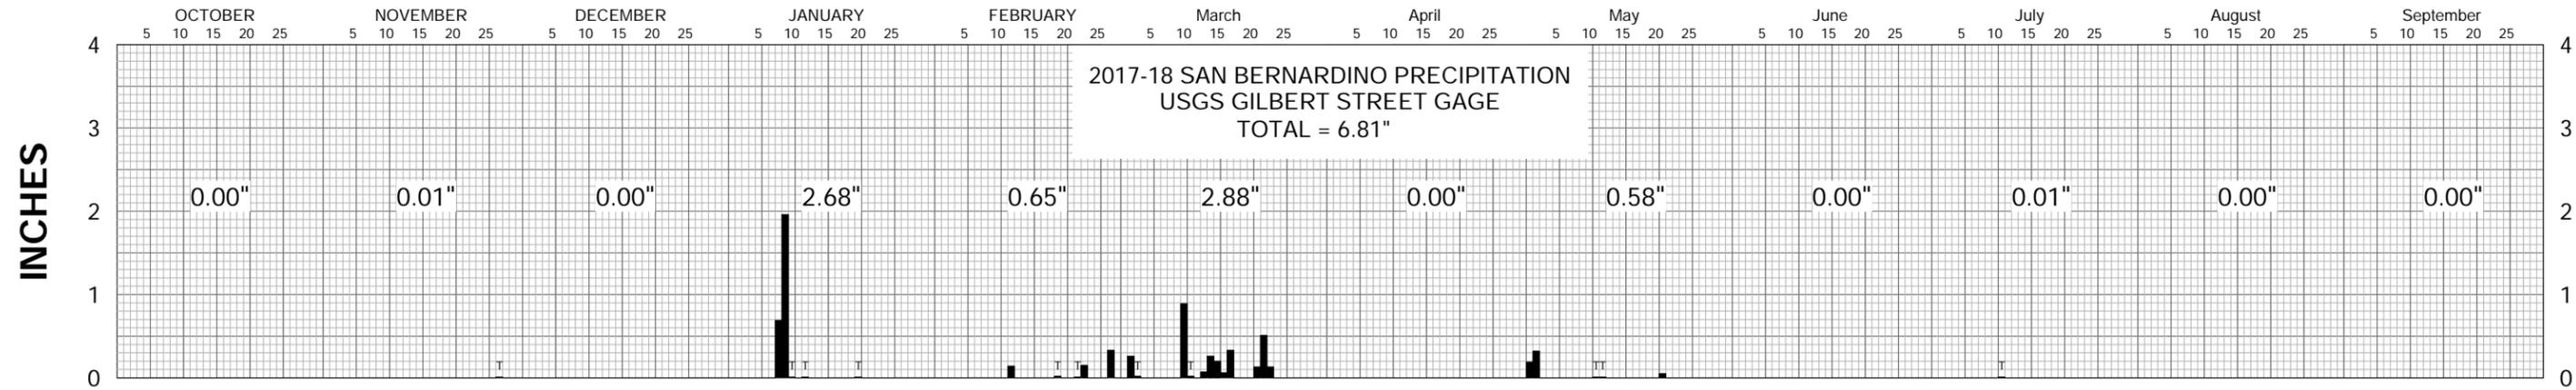

**DISCHARGE OF SANTA ANA RIVER AT RIVERSIDE NARROWS & SAN BERNARDINO PRECIPITATION
WATER YEAR 2017-18**

DISCHARGE OF SANTA ANA RIVER AT RIVERSIDE NARROWS STARTING WITH 1934-35

