


**NOTES:**

1. DIAMETER OF CONC. FOOTING SHALL BE 3 TIMES O.D. OF POST (10" MIN.)
2. INSTALLATION SHALL BE IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS, THE "GREEN BOOK" (STD. SPEC. FOR PUBLIC WORKS CONST. - CURRENT EDITION) AS MODIFIED HERE ON AND SHALL BE APPROVED BY THE DISTRICT.
3. ALIGNMENT DEFLECTIONS  $\geq 30^\circ$  SHALL BE INSTALLED SAME AS CORNER INSTALLATIONS.
4. WIRE REINFORCED RAZOR WIRE/BARBED TAPE UNCLIPPED HELICAL TYPE (18", GALV. 12#/ROLL, MAX STRETCH 33'/ROLL) SHALL BE INSTALLED IN LIEU OF BARBED WIRE WHERE SPECIFIED BY DISTRICT.

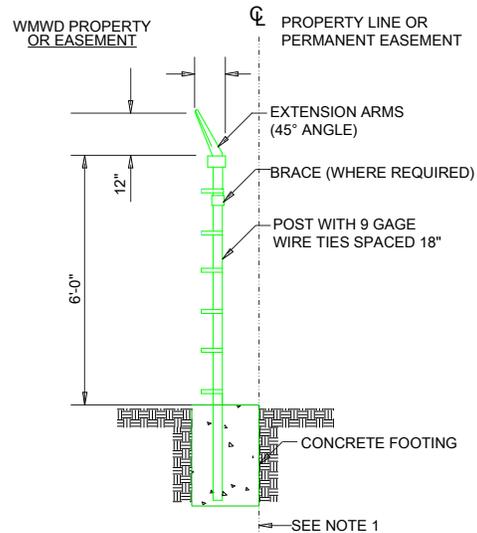

APPROVED DATE: January 1, 2011

*Joseph H. Hensley*

DIRECTOR OF ENGINEERING

STANDARD DRAWING  
CHAIN LINK FENCE DETAIL

STD. DWG.  
NO.

W-1590