



UNSURFACED MEDIANS  
ROADSIDE STRIPS  
& EASEMENTS

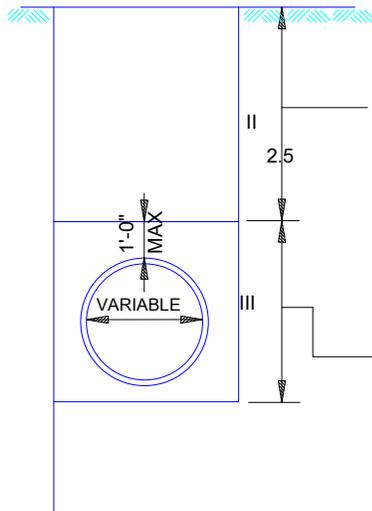

I STRUCTURAL ZONE  
II INTERMEDIATE ZONE  
III PIPE AND UTILITY ZONE

SURFACING (EXCLUDING  
GRAVEL ROADS)  
SURFACED STREETS

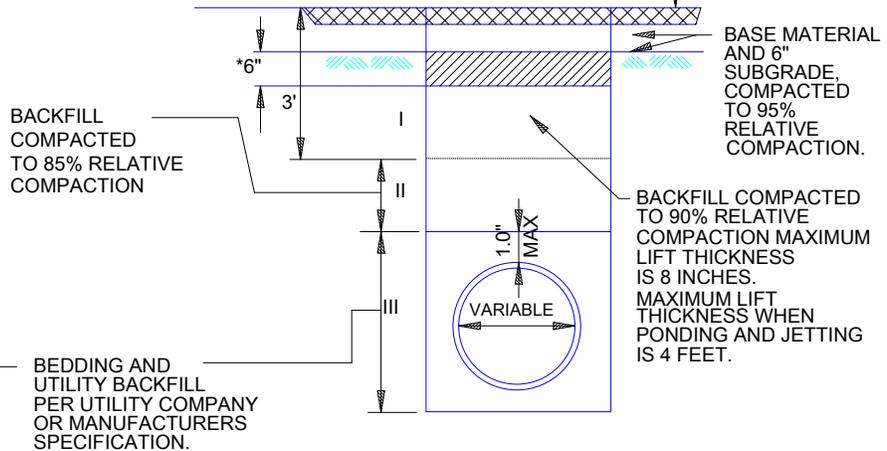

\* MAY BE COMPACTED TO 90% RELATIVE  
COMPACTION IF EXISTING SUBGRADE IS  
LESS THAN 90% AS INDICATED BY  
SOILS TEST.

NOTE:

WHEN A FIRM FOUNDATION IS  
NOT ENCOUNTERED, DUE TO  
SOFT, SPONGY OR OTHER  
UNSUITABLE MATERIAL, SUCH  
MATERIAL SHALL BE REMOVED  
TO THE LIMITS DIRECTED BY  
THE ROAD COMMISSION OR  
AFFECTED UTILITY CO., AND THE  
RESULTING EXCAVATION  
BACKFILLED WITH PIPE BEDDING.

REPLACE STRUCTURAL  
SECTION AS FOLLOWS:

SURFACING — EXISTING THICKNESS OR  
3" MINIMUM

BASE — SAME TYPE AND THICKNESS AS  
EXISTING BASE MATERIAL, 6" MIN.  
OR AS DIRECTED.



APPROVED DATE: January 1, 2011

*Joseph P. Besocke*

DIRECTOR OF ENGINEERING

STANDARD DRAWING  
TRENCH BACKFILL  
STANDARD NO. 818

STD. DWG.  
NO.

W-1540